

## ≣≣ unidrain®

≣≣ unidrain®

SELF-CLEANING WATER TRAP

## NEW! SELF-CLEANING WATER TRAP

The new water trap is self-cleaning and has a high capacity of 0.4–0.6 l/sec depending on the outlet unit used. So, it is more than sufficient for everyday needs, while effectively washing away hair, dirt and soap. The trap helps prevent potential causes of customer complaints.

Your customers avoid nuisance odour and they don't have to keep cleaning the trap all the time.






- Specially developed for Unidrain line drains
- High capacity of 0.4–0.6 l/s depending on the outlet unit used
- Easy to install: The protruding ends ensure that the trap sits completely level in the unit

| Description  | Suitable for following<br>outlet units  | Capacity*  | ltem no.  | EAN no.       |
|--|---|--|-----------|---------------|
| SELF-CLEANING WATER TRAP<br>Meets capacity and self-cleaning requirements<br>according to EN 1253 (the pan-European standard<br>for floor drains), and is VA-approved. Fits most<br>outlet units, including older models. A hook to lift<br>the water trap up from the outlet unit and a packet<br>of silicone lubricant are included. | <ul> <li>1411.0050</li> <li>1415.0050</li> <li>1416.0050</li> <li>1411.0075</li> <li>1421.0075</li> <li>1412.0075</li> <li>including older models<br/>(pre-2011)</li> </ul> | 0,4 – 0,6 l/sec<br>(depending on<br>the outlet unit<br>used) | 1820.0080 | 5707692013558 |



## MARKING CLEARLY SHOWS THE DIRECTION OF INSTALLATION FOR THE TRAP

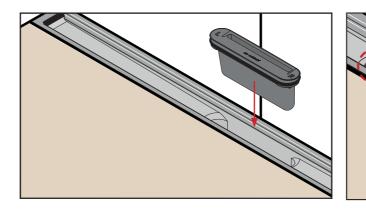





FITS IN ALL DRAIN UNITS AFTER 2008



Soft edge It sto

It stops before the flange





## CAN REPLACE THESE 2 WATER TRAPS

The self-cleaning water trap can replace these two types of Unidrain traps if mounted at the top of the outlet unit.



The groove extends to the flange