


Geberit AquaClean Alba WC complete solution, wall-hung WC

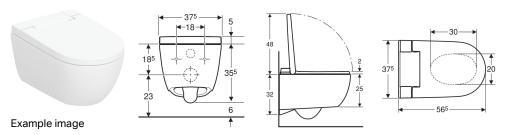

Application purposes

- For convenient toilet use
- For gently cleaning the anal area with water

Characteristics

- · Water heating by storage water heater
- ٠ Anal shower with WhirlSpray shower technology
- Spray intensity can be set to five different levels
- Shower water temperature can be adjusted via Geberit Home App
- Spray arm can be set to five different positions via Geberit Home App
- · Adjustable oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water •
- Descaling programme
- Rimless WC ceramic appliance featuring TurboFlush flush technology •
- Washdown WC
- User detection
- WC seat ring and WC lid with soft-closing mechanism •
- WC lid with SoftOpening
- · Functions can be controlled remotely
- Compatible with Geberit Home App
- Water supply connection on the left, hidden behind the WC ceramic
- · Mains connection with flexible three-core sheathed cable, on the right side, hidden behind the WC ceramic

Scope of delivery

- Water supply connection set for Sigma and Omega concealed cisterns • Sound insulation set 12 cm, installation height 112 cm
- Female socket for mains connection

- Remote control with wall-mounted case and battery CR2032
- Fastening material

To order additionally

· Geberit straight connector with sleeve and cover caps

Art. no.	Colour / surface	В	н	т	Protection class	Power consumption	
146.350.01.1	WC ceramic appliance: KeraTect / white Design cover: white	37.5 cm	40.5 cm	56.5 cm	I	850 W	New

Accessories

- · Reinforced braided hose with ball valve for Geberit AquaClean Alba / Sela
- Wall-mounted holder, small, theft-proof, for Geberit AquaClean remote controls (from year of manufacture 2024)

- · External water supply connection on the left possible with accessories
- · External mains connection with power outlet on the right possible
- · Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077

Technical data

Protection degree	IPX4
Nominal voltage	230 V AC
Mains frequency	50 Hz
Power consumption standby max.	0.5 W
Flow pressure	0.5–10 bar
Operating temperature	5–40 °C
Water temperature, adjustment range	34–40 °C
Spray time	20 s
Load WC seat max.	150 kg
Odour extraction unit	No
SoftOpening	Yes
With WC seat ring heating	No
With orientation light	No
With dryer functionality	No