
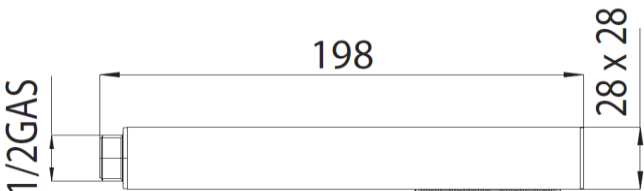
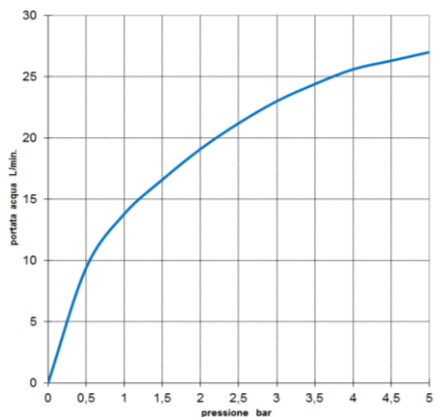


BOSSINI		SCHEDA TECNICA TECHNICAL SHEET		Date: 20/07/2017	Rev/0																										
Codice / Code: B00255		Descrizione / description: Doccia monogetto in ottone Single function Brass handshower																													
		Disegni / drawings 																													
Grafico di portata / Flow rate diagram <table border="1"> <thead> <tr> <th></th> <th>rain</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td></tr> <tr><td>0,5</td><td>4,9</td></tr> <tr><td>1</td><td>7</td></tr> <tr><td>1,5</td><td>8,7</td></tr> <tr><td>2</td><td>10,1</td></tr> <tr><td>2,5</td><td>11,4</td></tr> <tr><td>3</td><td>12,3</td></tr> <tr><td>3,5</td><td>13,1</td></tr> <tr><td>4</td><td>14</td></tr> <tr><td>4,5</td><td>14,9</td></tr> <tr><td>5</td><td>15,7</td></tr> <tr> <td>pressione bar</td> <td>portata L/min</td> </tr> </tbody> </table>			rain	0	0	0,5	4,9	1	7	1,5	8,7	2	10,1	2,5	11,4	3	12,3	3,5	13,1	4	14	4,5	14,9	5	15,7	pressione bar	portata L/min				
	rain																														
0	0																														
0,5	4,9																														
1	7																														
1,5	8,7																														
2	10,1																														
2,5	11,4																														
3	12,3																														
3,5	13,1																														
4	14																														
4,5	14,9																														
5	15,7																														
pressione bar	portata L/min																														
MATERIALI / materials																															
Brass, Silicone, Nbr, Acetal																															
CARATTERISTICHE IDRAULICHE / hydraulic features																															
	pressione pressure	portata flow rate	temperatura temperature	solo per miscelatori termostatici only for thermostatic mixers																											
min	1 bar	5L/min	--	Blocco di sicurezza safety lock	/																										
max	5 bar	--	<70°C	Temperatura acqua fredda cold water temperature	/																										
consigliata recommended	2-3 bar	--	<42°C	Temperatura acqua calda hot water temperature	/																										
CERTIFICAZIONI / CERTIFICATIONS: ACS(FRA), NF [EN 1112] (FRA), WATERMARK [AS/NZS 3662:2005] (AUS), CSA [ASME A112.18.1/CSA B125.1](CAN/USA), IAPMO [ASME A112.18.1/CSA B125.1] (USA/CAN).																															
CONFORMITA' / CONFORMITY : Chrome plating - EN 248.																															