
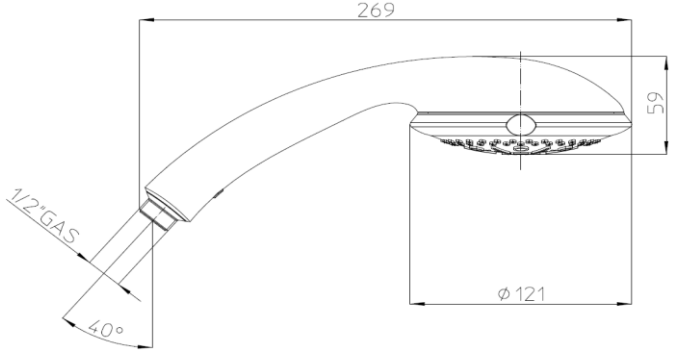
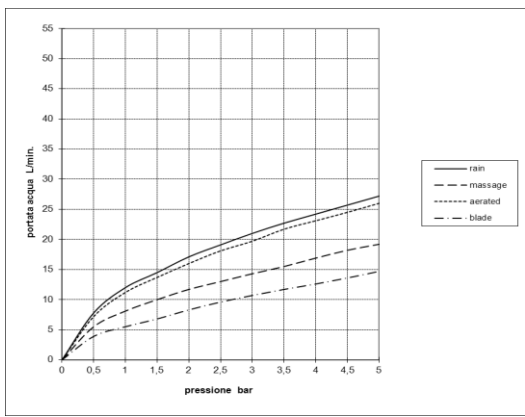


BOSSINI		SCHEDA TECNICA TECHNICAL SHEET		Date: 14/12/2015	Rev/0																																																												
Codice / Code: B00102		Descrizione / description: Doccia OCEAN4 4 funzioni Ø120 OCEAN4 4 functions handshower Ø120																																																															
Foto / image		Disegni / drawings																																																															
																																																																	
Grafico di portata / Flow rate diagram																																																																	
<table border="1"> <thead> <tr> <th></th> <th>rain</th> <th>massage</th> <th>aerated</th> <th>blade</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>0,5</td><td>7,8</td><td>5,5</td><td>7,2</td><td>3,9</td></tr> <tr><td>1</td><td>12</td><td>8,1</td><td>11,2</td><td>5,5</td></tr> <tr><td>1,5</td><td>14,5</td><td>10</td><td>13,7</td><td>6,8</td></tr> <tr><td>2</td><td>17,1</td><td>11,7</td><td>16</td><td>8,3</td></tr> <tr><td>2,5</td><td>19,1</td><td>13</td><td>18,1</td><td>9,6</td></tr> <tr><td>3</td><td>21</td><td>14,3</td><td>19,7</td><td>10,7</td></tr> <tr><td>3,5</td><td>22,7</td><td>15,5</td><td>21,7</td><td>11,7</td></tr> <tr><td>4</td><td>24,2</td><td>16,9</td><td>23,1</td><td>12,6</td></tr> <tr><td>4,5</td><td>25,7</td><td>18,2</td><td>24,5</td><td>13,6</td></tr> <tr><td>5</td><td>27,2</td><td>19,2</td><td>26</td><td>14,7</td></tr> </tbody> </table>			rain	massage	aerated	blade	0	0	0	0	0	0,5	7,8	5,5	7,2	3,9	1	12	8,1	11,2	5,5	1,5	14,5	10	13,7	6,8	2	17,1	11,7	16	8,3	2,5	19,1	13	18,1	9,6	3	21	14,3	19,7	10,7	3,5	22,7	15,5	21,7	11,7	4	24,2	16,9	23,1	12,6	4,5	25,7	18,2	24,5	13,6	5	27,2	19,2	26	14,7				
	rain	massage	aerated	blade																																																													
0	0	0	0	0																																																													
0,5	7,8	5,5	7,2	3,9																																																													
1	12	8,1	11,2	5,5																																																													
1,5	14,5	10	13,7	6,8																																																													
2	17,1	11,7	16	8,3																																																													
2,5	19,1	13	18,1	9,6																																																													
3	21	14,3	19,7	10,7																																																													
3,5	22,7	15,5	21,7	11,7																																																													
4	24,2	16,9	23,1	12,6																																																													
4,5	25,7	18,2	24,5	13,6																																																													
5	27,2	19,2	26	14,7																																																													
MATERIALI / materials																																																																	
ABS, Silicone, NBR, POM, Stainless steel																																																																	
CARATTERISTICHE IDRAULICHE / hydraulic features																																																																	
	pressione pressure	portata flow rate	temperatura temperature	solo per miscelatori termostatici only for thermostatic mixers																																																													
min	1 bar	--	--	Blocco di sicurezza safety lock	/																																																												
max	5 bar	--	<70°C	Temperatura acqua fredda cold water temperature	/																																																												
consigliata recommended	2-3 bar	--	<42°C	Temperatura acqua calda hot water temperature	/																																																												
CERTIFICAZIONI / CERTIFICATIONS:																																																																	
ACS(FRA), NF [EN 1112] (FRA), WATERMARK [AS/NZS 3662:2005] (AUS), WELS PUB [1 thick] (SGP), CSA [ASME A112.18.1/CSA B125.1] (CAN/USA), IAPMO [ASME A112.18.1/CSA B125.1] (USA/CAN).																																																																	
CONFORMITA' / CONFORMITY :																																																																	
Chrome plating - EN 248.																																																																	