

EAN: 4057304019197  
[static.hansa.com/55350110](http://static.hansa.com/55350110)



- Shower
- Thermostatic
- Wall mounted
- Chrome
- Temperature control handle, Flow control handle
- Turn operated diverter, Integrated into flow control handle
- Hand shower, Shower rail, Overhead shower, Shower hose (1500 mm), Anti limescale technology (easy to clean)
- Normal - Even and soft water stream, Rain - Even and strong water stream
- Safety stop against scalding at 38°C, The housing of the fittings conducts minimal heat
- Ceramic head part for flow control, Thermostatic cartridge for automatic temperature control, Non-return valve(s), Litter filter(s)
- Eccentric coupling(s), Cover plate(s), Silencer(s)
- Flexible length / can be shortened
- 1 spray function

## Technical data

### Flow properties

Flow-rate at 3 bar **10.8 / 14.4 l/min**

### Technical properties


DN-size (nominal dimension) **DN 15**  
 Hot water supply **max. +65°C**  
 Working pressure **1-10 bar**  
 Connection size **G1/2**  
 Installation width **CC150 ± 15 mm**  
 Backflow prevention (EN1717) **EB**  
 Material **Brass**




### Regulations

EN standard **EN 1111, EN 1112, EN 1113**

### Approvals and Declarations

ABP **PA-IX 10077/IIBO**

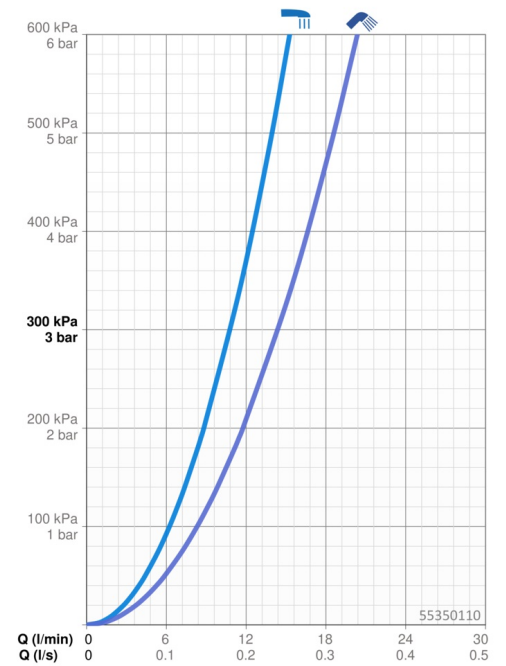

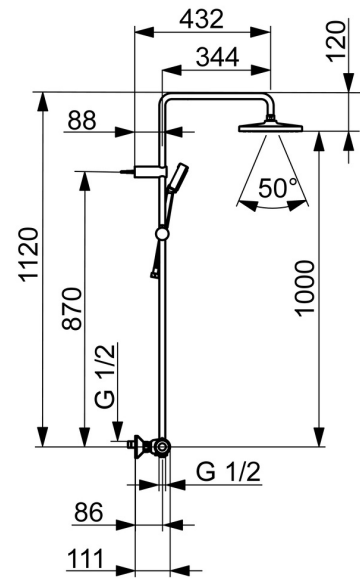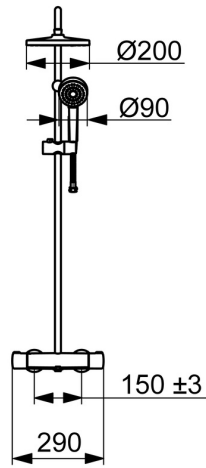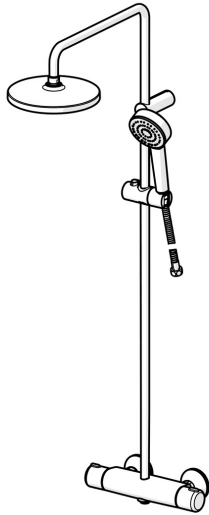

## Spare parts

SP55350110

Name

Code