



CoverMate III

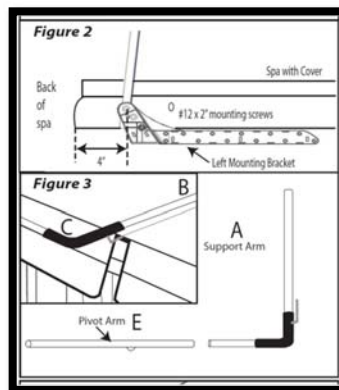

Includes

- Black powder-coated, rust free aluminum tubing
- Euro-styled composite brackets with beauty covers that hide mounting hardware for a clean look
- Hydraulic lift utilizes an exclusive wind lock system that virtually eliminates broken shock syndrome
- Ideal when clearance behind spa is limited (6 inches) or as privacy screen
- Foam grips for comfortable handling
- TowelMate for hanging up to three towels
- Available with **optional Deckmount brackets**

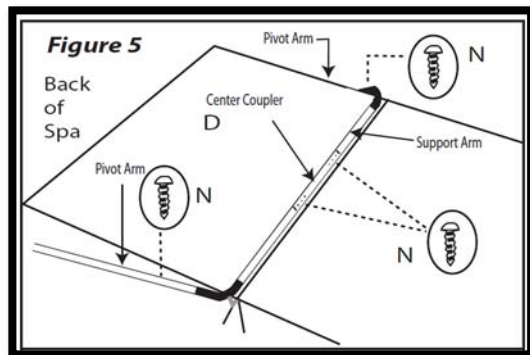

- | |
|---|
| ○ Requires 6 inches clearance behind spa |
| ○ Requires 4 to 5 inches of clearance on each side of the spa |
| ○ Fits virtually any spa from 6 feet to 8 feet in length and width |

Specialty CMIII

- **Maxxus and Aspen:** Extended brackets (aluminum) and extended pivot arms
 - Bi-fold needs extended bracket and pivot arms
 - Tri-fold needs extended brackets
- **Jacuzzi:**
 - 425/460: Standard CMIII pivot arms and aluminum bracket (24" x 3") and filler piece (9 3/4" x 7 3/4")
 - 465: 38" Extended pivot arms and aluminum bracket (30" x 3") and filler piece (13" x 11 1/4")
 - 470/480: 38" Extended pivot arms and aluminum bracket (30" x 3") and filler piece (19" x 11 1/4")
 - 495: 43" Extended pivot arms and aluminum bracket (30" x 3") and filler piece (19" x 11 1/4")
- **38" Extended Pivot Arms:** Increases length to a maximum length of 9'2" (works on 14' and 17' swim spas)
- **43" Extended Pivot Arms:** increases length to a maximum length of 10' (works on 19' swim spas)
- **Extended Bracket:** Allows bracket to be installed on larger corner radius spas (over 12")
- **Extended Coupler:** Increases width to a maximum of 9' 2"

Dimensions

- ✓ Plastic Bracket: 27" L x 2" W
- ✓ Deckmount "L" Bracket: 23" L x 2" W
- ✓ Extended Bracket: 39" L x 3" W (aluminum)
- ✓ Support Arm: 20" x 40"
- ✓ Pivot Arm: 31"
- ✓ Extended Pivot Arm: 38" or 43"
- ✓ Coupler: 42"
- ✓ Extended Coupler: 55"
- ✓ Foam Grip: 8"