


Uponor Minitec nubfoil self-adh 15,4m² 9,9x1,1 1100x700x12mm

1005261

- Pipe fixation panel made of polystyrol, with overlap on both sides with triangular studs; perforated panel for installation between levelling compound and substructure; with self-adhesive back for proper fixture to screed and tiled floors.

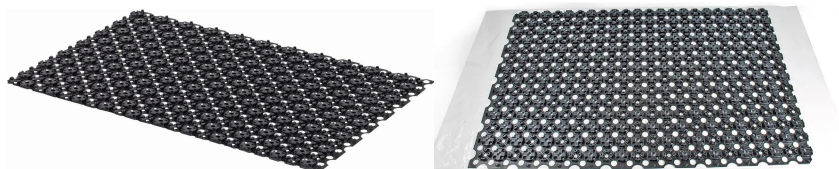

Application information Uponor Minitec nubfoil self-adh

Specification

- Minitec underfloor heating system for fixation on solid floors or specified insulation materials
- designed as sturdy pipe fixing system of minimum height, with integrated pipe laying channels for correct pipe laying distances
- for use with Uponor Minitec PE-Xa pipes 9.9 x 1.1 mm; allowing for straight and diagonal pipe laying
- EN 13501-1 fire classification: class E.
- standard flammability, building-material class B2, conforming to DIN 4102.
- Pipe spacing: Vz 5, 10, 15
- Net surface with overlapping nubs: 0,77m²

Application


- radiant underfloor heating and cooling
- very low construction height
- for use with qualified filler materials

Certification

- DIN CERTCO: 7F170-F

Uponor Minitec nubfoil self-adh 15,4m2 9,9x1,1 1100x700x12mm

1005261

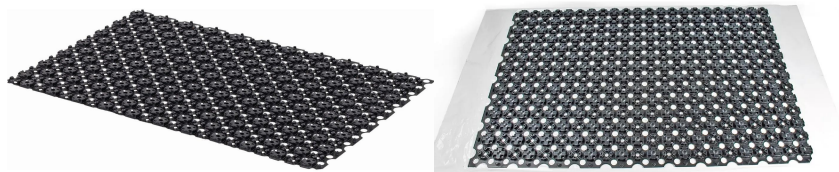

Technical data

Item (unit of measurement)	Square Meter
Packaging Quantity PL1	15.4
Packaging Quantity PL4	123.2

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com