


## Uponor Minitec ring natural 9,9x1,1

1005263

- PE-Xa

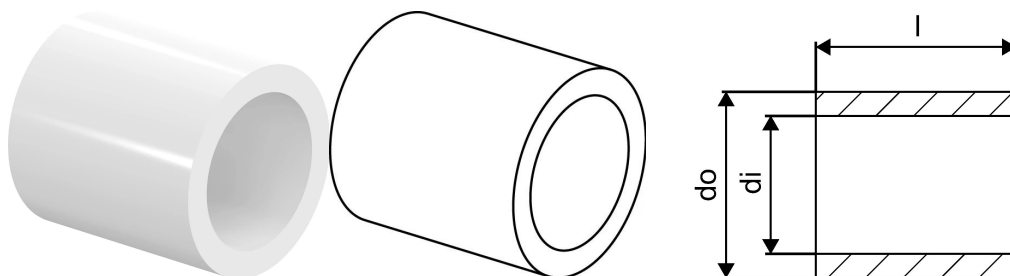

### Application information Uponor Minitec ring natural

#### Specification

- Minitec underfloor heating system for fixation on solid floors or specified insulation materials
- designed as sturdy pipe fixing system of minimum height, with integrated pipe laying channels for correct pipe laying distances
- for use with Uponor Minitec PE-Xa pipes 9.9 x 1.1 mm; allowing for straight and diagonal pipe laying
- EN 13501-1 fire classification: class E.
- standard flammability, building-material class B2, conforming to DIN 4102.
- Pipe spacing: Vz 5, 10, 15
- Net surface with overlapping nubs: 0,77m<sup>2</sup>

#### Application


- radiant underfloor heating and cooling
- very low construction height
- for use with qualified filler materials

#### Certification

- DIN CERTCO: 7F170-F

## Uponor Minitec ring natural 9,9x1,1

1005263

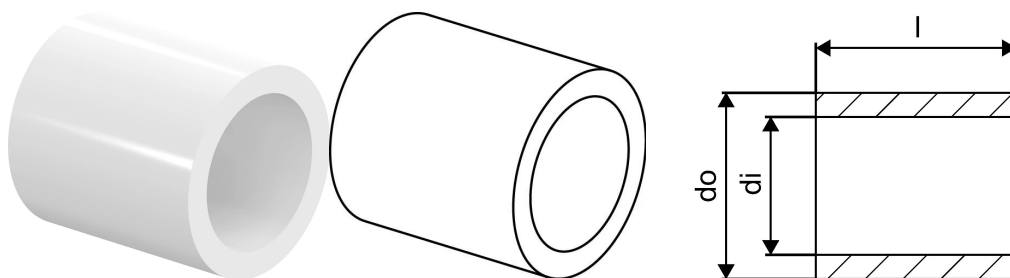

### Technical data

Item (unit of measurement)	Piece
Length (l)	15 mm
Packaging Quantity PL1	10
Packaging Quantity PL3	1600
Packaging Quantity PL4	57600

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E [info@uponor.com](mailto:info@uponor.com)  
F +358 (0)20 129 2841

[www.uponor.com](http://www.uponor.com)