


Uponor Uni Pipe PLUS white 32x3,0 50m

1059583

- coil
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier

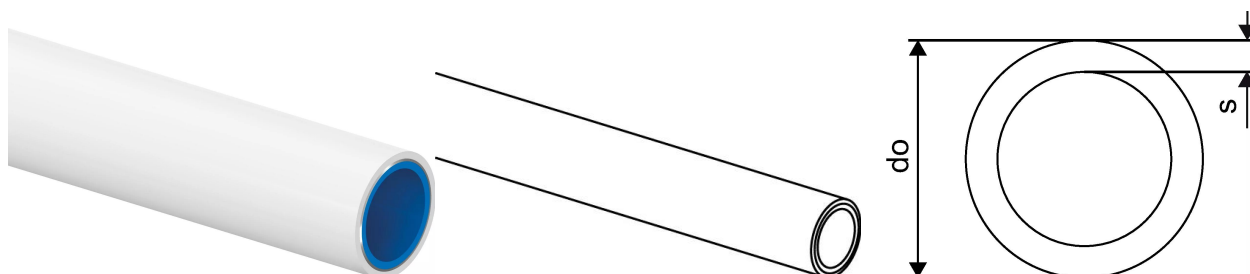

Application information Uponor Uni Pipe PLUS white

Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

Application


- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor Uni Pipe PLUS white 32x3,0 50m

1059583

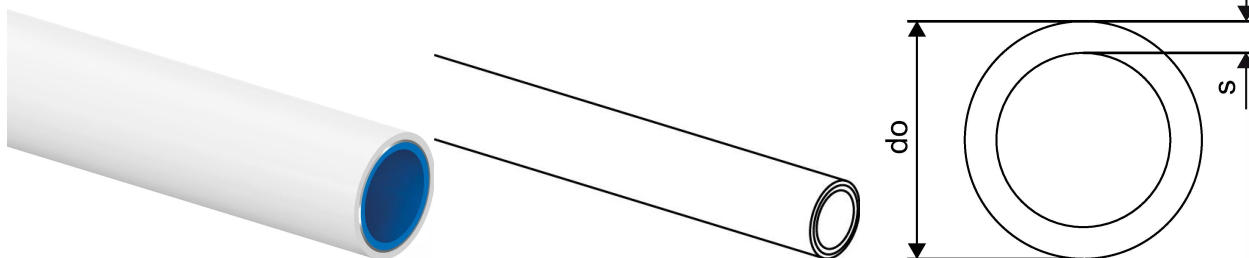

Technical data

Item no EAN	4021598121317
Item no GTIN	04021598121317
Item no VVS	087480332
RSK no.	2004928
Item no NRF	5072096
Item no LVI	1720144
Item (unit of measurement)	m
Packaging Quantity 1	50
Packaging Quantity 4	400
Packaging GTIN PL1	06414905412181
Packaging GTIN PL4	06414905412198

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com