


Uponor S-Press composite elbow 45deg PPSU 40-40

1046388

- Fast installation with easy bevel and without calibration
- Colour code

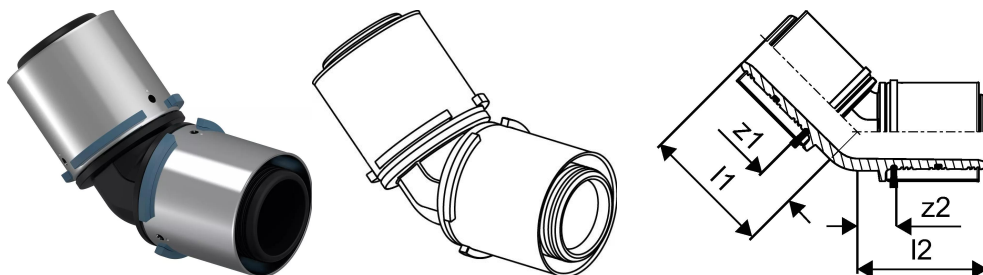

Application information Uponor S-Press composite elbow 45deg PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

Uponor S-Press composite elbow 45deg PPSU 40-40

1046388

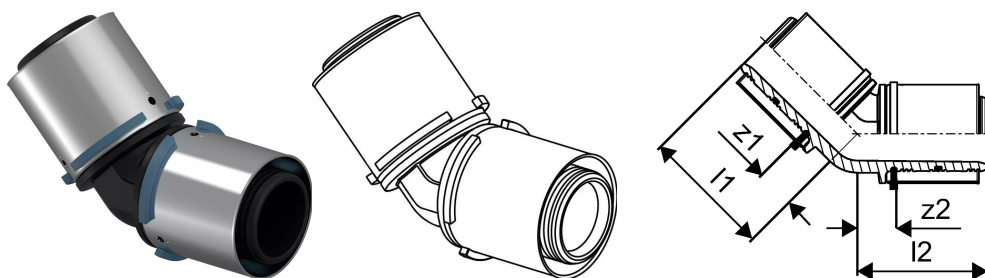

Technical data

Item no VVS	087433140
Item no NRF	5071977
Item (unit of measurement)	Piece
Length (l1)	56 mm
Length (l2)	56 mm
Z-measurement z2	17 mm
Packaging Quantity PL1	5
Packaging Quantity PL4	960

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com