


## Uponor S-Press composite elbow 45deg PPSU 50-50

1046389

- Fast installation with easy bevel and without calibration
- Colour code

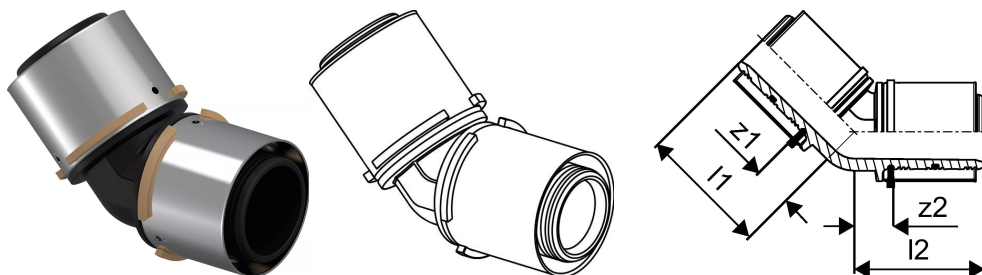

### About Uponor S-Press composite elbow 45deg PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.  
E.g.
  - DVGW
  - AENOR

## Uponor S-Press composite elbow 45deg PPSU 50-50

1046389

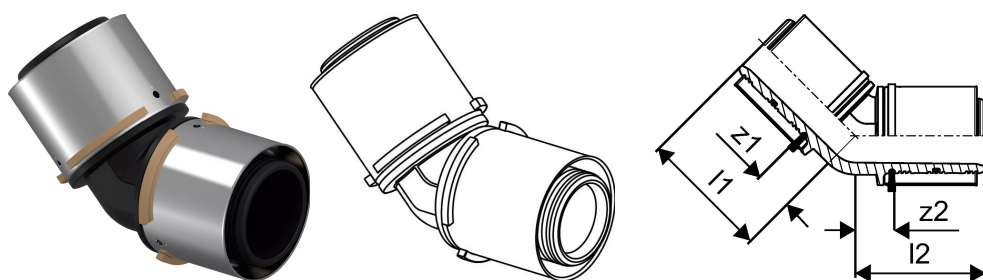

### Technical data

Item no VVS	087433150
Item no NRF	5071978
Item (unit of measurement)	pce
Length (l1)	59 mm
Length (l2)	59 mm
z2	20 mm
Packaging Quantity PL1	3
Packaging Quantity PL4	576

### Technical documents

Download documents here

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)