


## Uponor S-Press PLUS elbow female thread 25-Rp3/4"FT

1070542

- Made of tin-plated DR brass

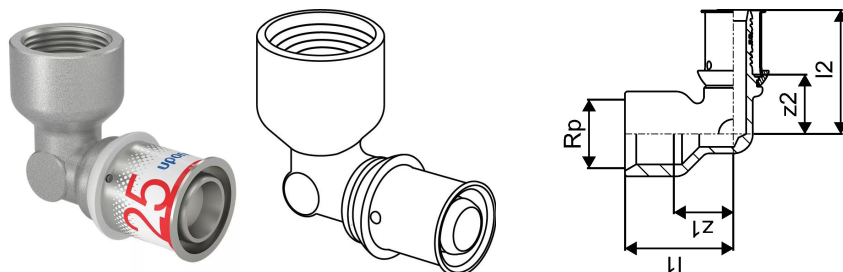

### About Uponor S-Press PLUS elbow female thread

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS elbow female thread 25-Rp3/4"FT

1070542

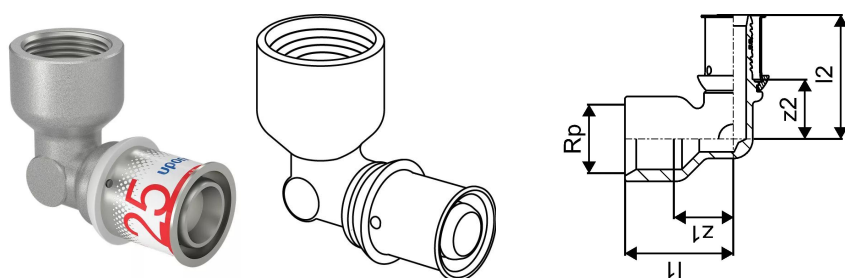

### Technical data

Item no VVS	045472310
Item no NRF	5114471
Item (unit of measurement)	pce
Female_thread_Rp	3/4 inch
Length (l1)	40 mm
Length (l2)	50 mm
z2	22 mm
Packaging Quantity PL1	5
Packaging Quantity PL3	20
Packaging Quantity PL4	1920

### Technical documents

Download documents here

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)