


## Uponor S-Press PLUS adapter male thread 25-R3/4"MT

1070507

- Made of tin-plated DR brass

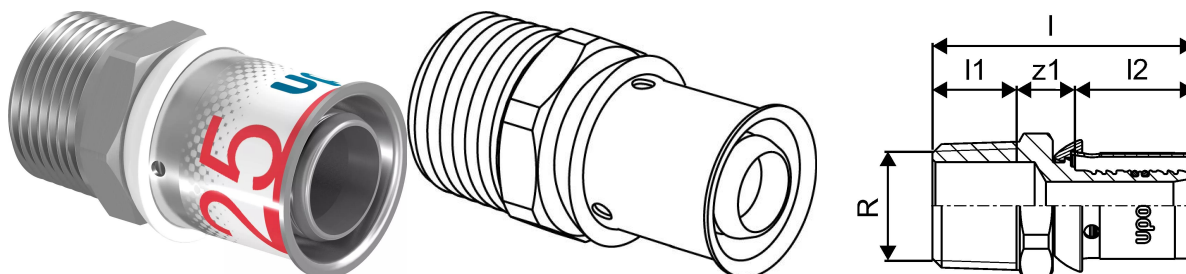

### Application information Uponor S-Press PLUS adapter male thread

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS adapter male thread 25-R3/4"MT

1070507

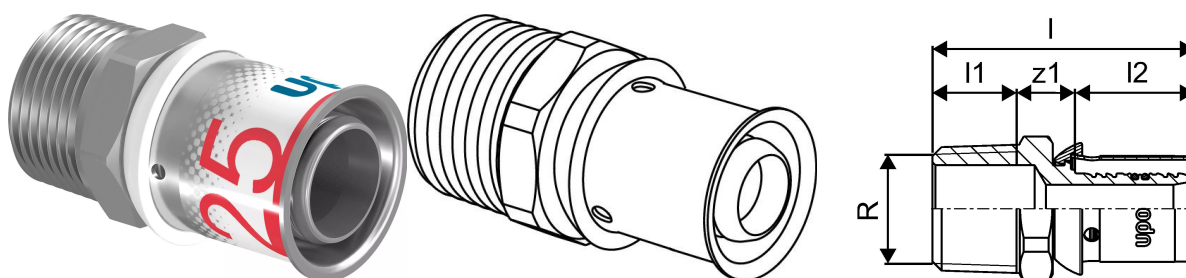

### Technical data

Item (unit of measurement)	Piece
Item no VVS	045481310
Item no LVI	1720177
Item no NRF	5114433
Length (l)	55 mm
Length (l1)	15 mm
Length (l2)	28 mm
Packaging Quantity PL1	10
Packaging Quantity PL3	80
Packaging Quantity PL4	3840

### Documents

Page with all documents

#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com