


Uponor S-Press reducer PPSU 50-32

1039943

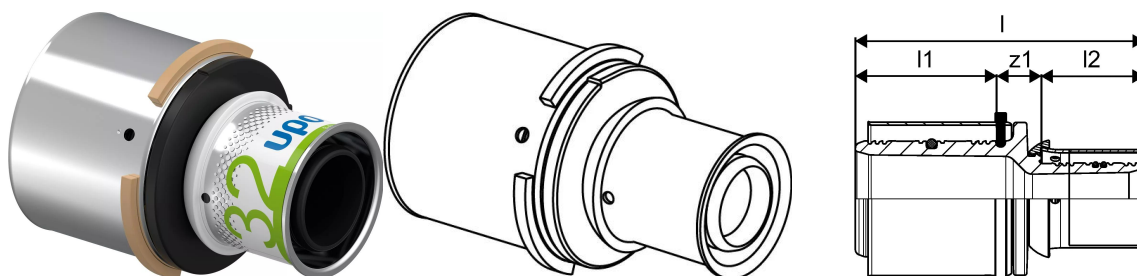

Application information Uponor S-Press reducer PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press reducer PPSU 50-32

1039943

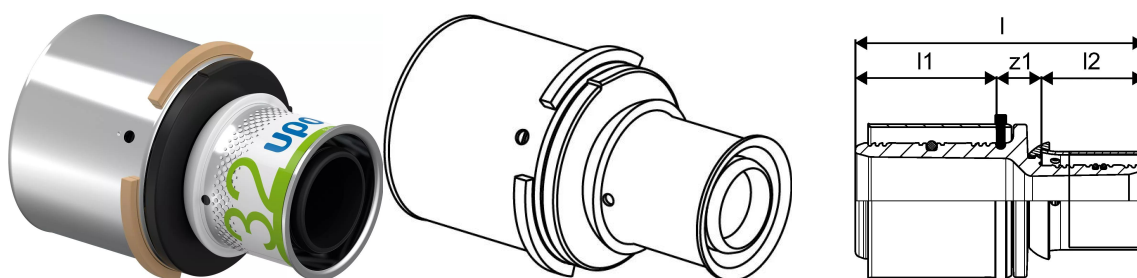

Technical data

Item (unit of measurement)	pce
Item no VVS	087455150
Item no LVI	1720700
Item no NRF	5114396
Length (l)	80 mm
Length (l1)	39 mm
Length (l2)	28 mm
Packaging Quantity PL1	3
Packaging Quantity PL4	1152

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com