


## Uponor S-Press PLUS tee female thread 20-Rp1/2"FT-20

**1070596**

- Made of tin-plated DR brass

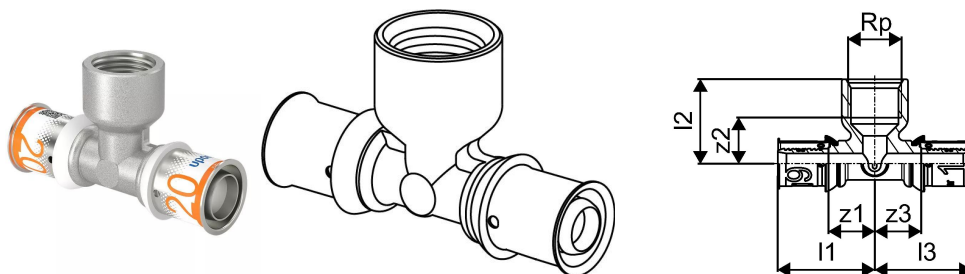

### Application information Uponor S-Press PLUS tee female thread

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS tee female thread 20-Rp1/2"FT-20

1070596

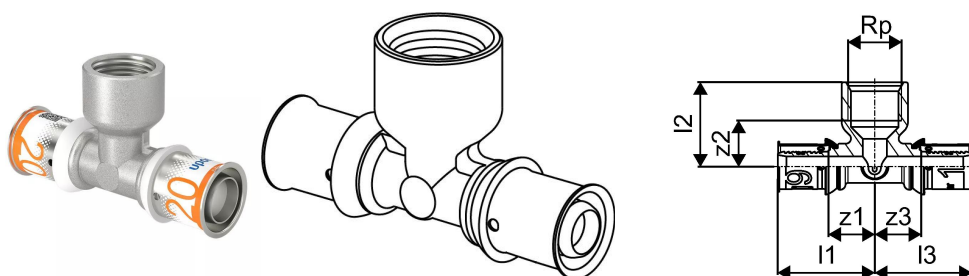

### Technical data

Item (unit of measurement)	pce
Item no VVS	045478239
Item no LVI	1720770
Item no NRF	5114515
Female thread Rp	1/2 inch
Length (l1)	40 mm
Length (l2)	35 mm
Length (l3)	40 mm
Z-measurement z2	20 mm
Z-measurement z3	19 mm
Packaging Quantity PL1	15
Packaging Quantity PL3	60
Packaging Quantity PL4	2880

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com