


Uponor S-Press PLUS tee male thread 32-R3/4"MT-32

1070594

- Made of tin-plated DR brass

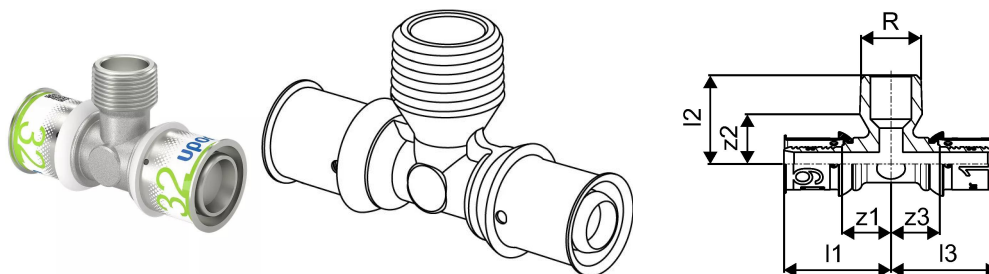

Application information Uponor S-Press PLUS tee male thread

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS tee male thread 32-R3/4"MT-32

1070594

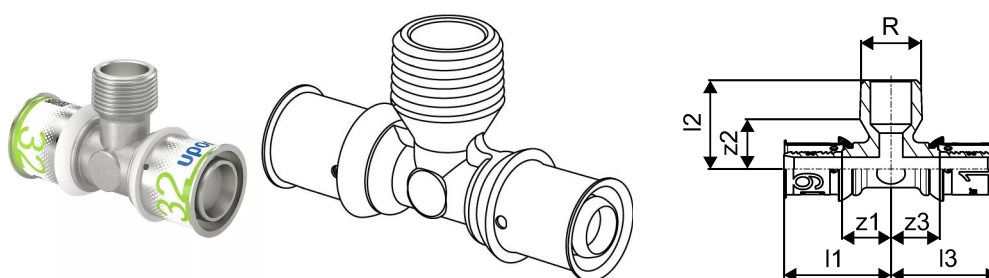

Technical data

Item (unit of measurement)	pce
Item no VVS	045477371
Item no LVI	1720768
Item no NRF	5114513
Length (l1)	48 mm
Length (l2)	40 mm
Length (l3)	48 mm
Z-measurement z2	25 mm
Z-measurement z3	19 mm
Packaging Quantity PL1	5
Packaging Quantity PL3	20
Packaging Quantity PL4	960

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com