


## Uponor S-Press PLUS tee red. PPSU 20-16-20

1039950

- Fixed stainless steel sleeve

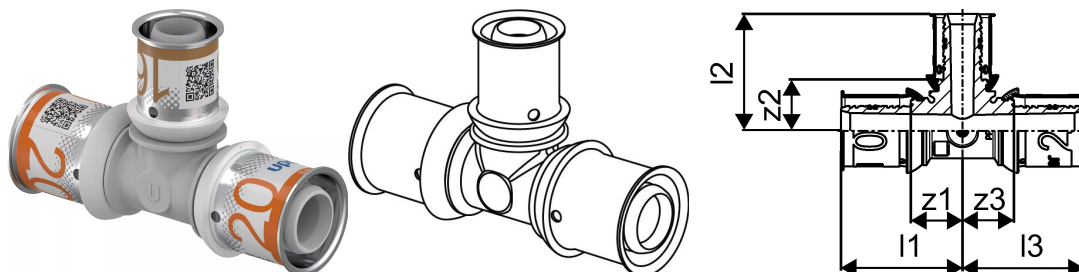

### Application information Uponor S-Press PLUS tee red. PPSU

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS tee red. PPSU 20-16-20

1039950

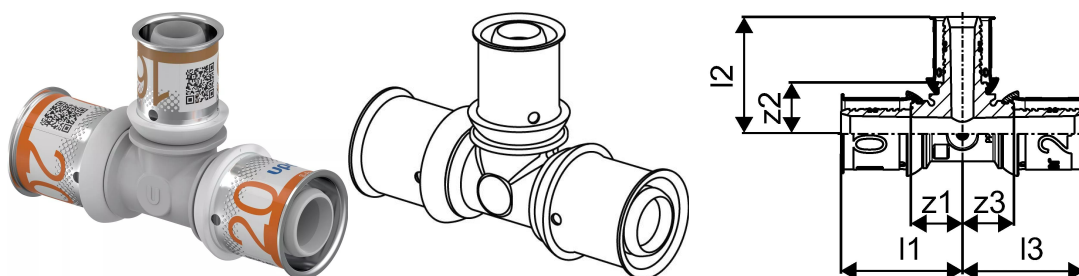

### Technical data

Item (unit of measurement)

Piece

Item no VVS

087443120

Item no LVI

1720707

Item no NRF

5114404

Length (I1)

37 mm

Length (I2)

36 mm

Length (I3)

37 mm

Z-measurement z2

16 mm

Z-measurement z3

16 mm

Packaging Quantity PL1

10

Packaging Quantity PL3

80

Packaging Quantity PL4

1920

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com