


## Uponor S-Press PLUS tee PPSU 25-25-25

1039946

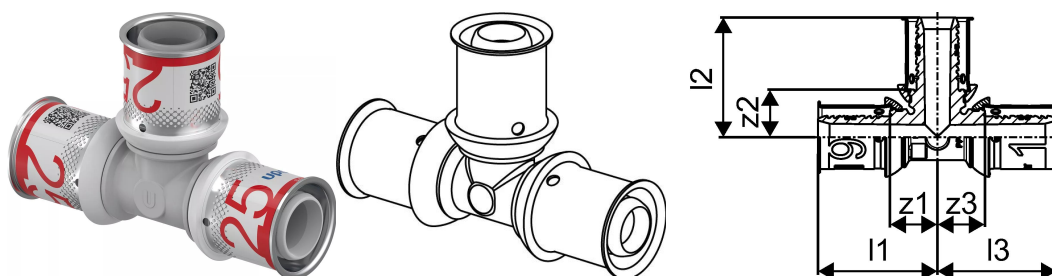

## Application information Uponor S-Press PLUS tee PPSU

## Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

## Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

## Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS tee PPSU 25-25-25

1039946

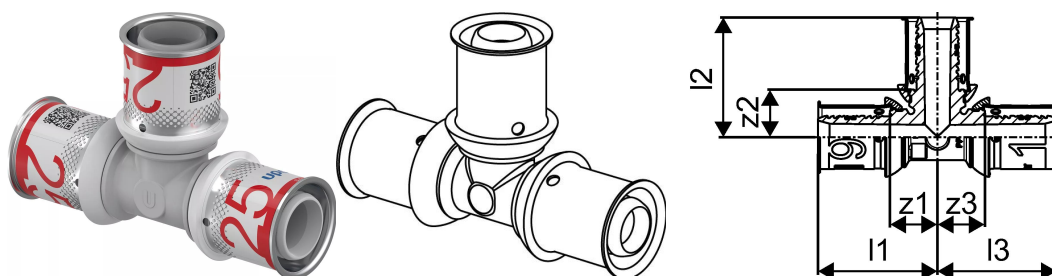

### Technical data

Item (unit of measurement)

Piece

Item no VVS

087440125

Item no LVI

1720703

Item no NRF

5114399

Length (l1)

48 mm

Length (l2)

48 mm

Length (l3)

48 mm

Z-measurement z2

19 mm

Z-measurement z3

19 mm

Packaging Quantity PL1

5

Packaging Quantity PL3

20

Packaging Quantity PL4

960

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com