


Uponor S-Press PLUS tee 32-32-32

1070563

- Made of tin-plated DR brass

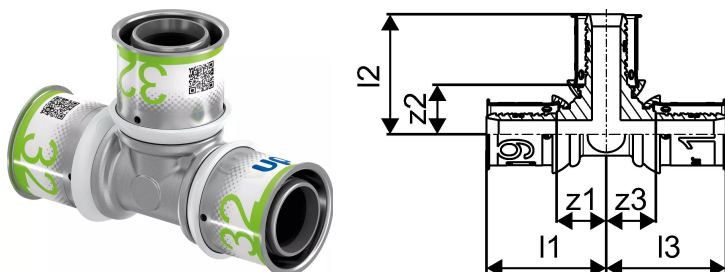

About Uponor S-Press PLUS tee

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS tee 32-32-32

1070563

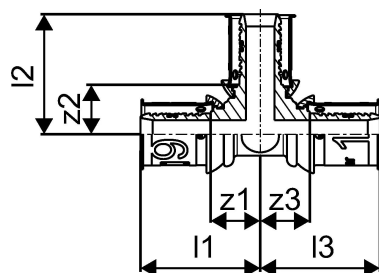

Technical data

Item no VVS 045476032

Item no NRF 5114489

Item (unit of measurement) pce

Length (l1) 51 mm

Length (l2) 51 mm

Length (l3) 51 mm

z2 23 mm

z3 23 mm

Packaging Quantity PL1 5

Packaging Quantity PL3 20

Packaging Quantity PL4 960

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb