


## Uponor S-Press tee red. PPSU 40-32-32

1039965

- Fast installation with easy bevel and without calibration
- Colour code

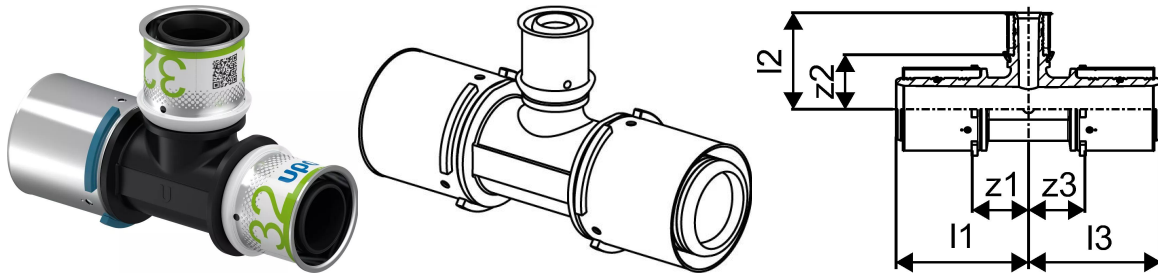

### Application information Uponor S-Press tee red. PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor S-Press tee red. PPSU 40-32-32

1039965

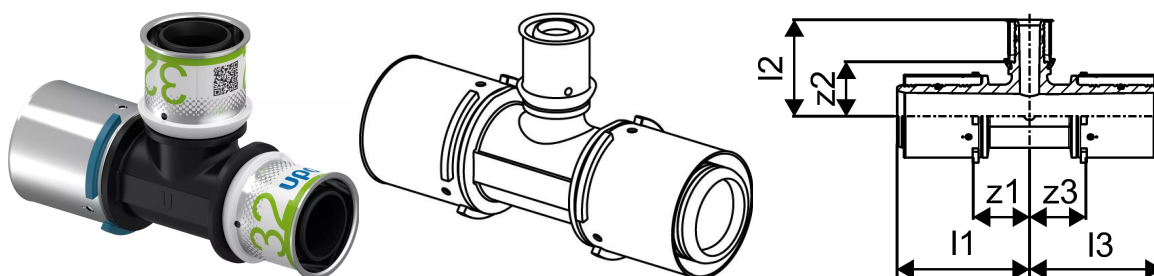

### Technical data

Item (unit of measurement)	Piece
Item no VVS	087443140
Item no LVI	1720722
Item no NRF	5114421
Length (I1)	68 mm
Length (I2)	56 mm
Length (I3)	56 mm
Z-measurement z2	28 mm
Z-measurement z3	28 mm
Packaging Quantity PL1	5
Packaging Quantity PL4	960

### Documents

Page with all documents

#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com