


Uponor S-Press composite tee PPSU 40-40-40

1046390

- Fast installation with easy bevel and without calibration
- Colour code

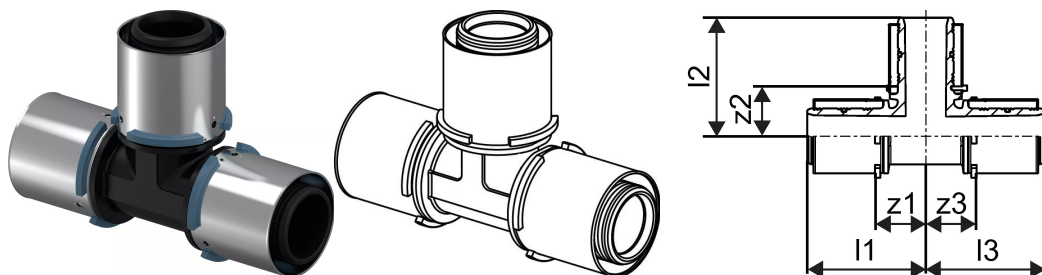

Application information Uponor S-Press composite tee PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press composite tee PPSU 40-40-40

1046390

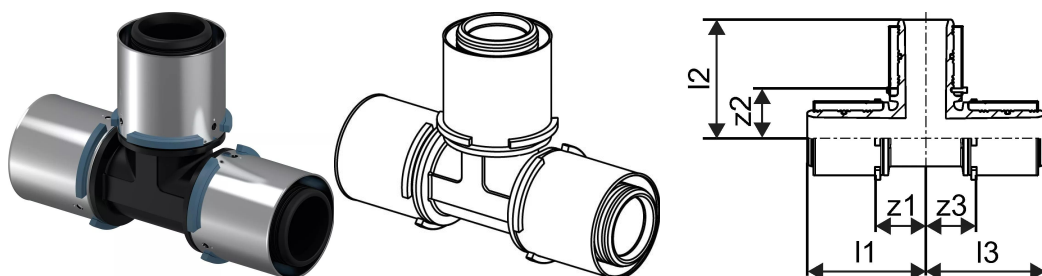

Technical data

Item (unit of measurement)	Piece
Item no VVS	087440140
Item no LVI	1722248
Item no NRF	5071979
Length (l1)	68 mm
Length (l2)	68 mm
Length (l3)	68 mm
Z-measurement z2	29 mm
Z-measurement z3	29 mm
Packaging Quantity PL1	5
Packaging Quantity PL4	720

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com