


Uponor S-Press tee 40-40-40

1046921

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

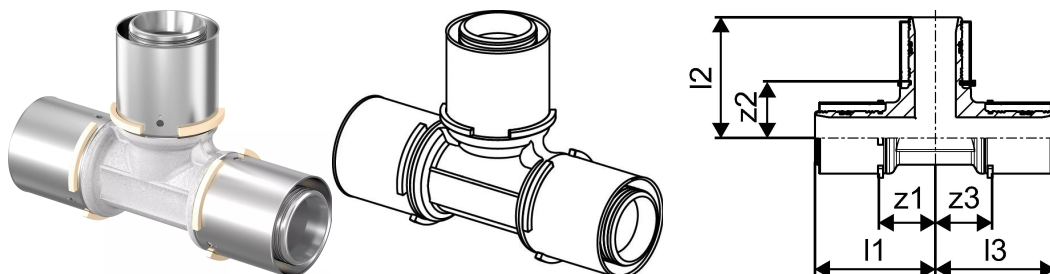

About Uponor S-Press tee

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

Uponor S-Press tee 40-40-40

1046921

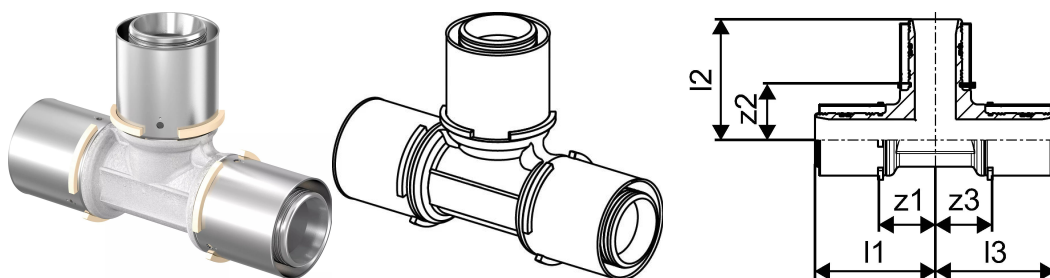

Technical data

| | |
|----------------------------|-----------|
| Item no VVS | 045476040 |
| Item (unit of measurement) | pce |
| Length (l1) | 72 mm |
| Length (l2) | 72 mm |
| Length (l3) | 72 mm |
| z2 | 34 mm |
| z3 | 34 mm |
| Packaging Quantity PL1 | 5 |
| Packaging Quantity PL4 | 400 |

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb