

## Uponor S-Press tee reducer 50-25-40

**1046924**

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code



### About Uponor S-Press tee reducer

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- if not different mentioned:  
Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.  
E.g.
  - DVGW
  - AENOR

## Uponor S-Press tee reducer 50-25-40

1046924

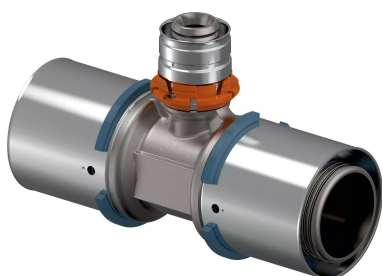

### Technical data

Item no VVS	045476436
Item (unit of measurement)	pce
Length (l1)	61 mm
Length (l2)	65 mm
Length (l3)	61 mm
z2	35 mm
z3	23 mm
Packaging Quantity PL1	3
Packaging Quantity PL4	300

### Technical documents

Download documents here

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)