


Uponor S-Press composite tee reducer PPSU 50-40-50

1046400

- Fast installation with easy bevel and without calibration
- Colour code

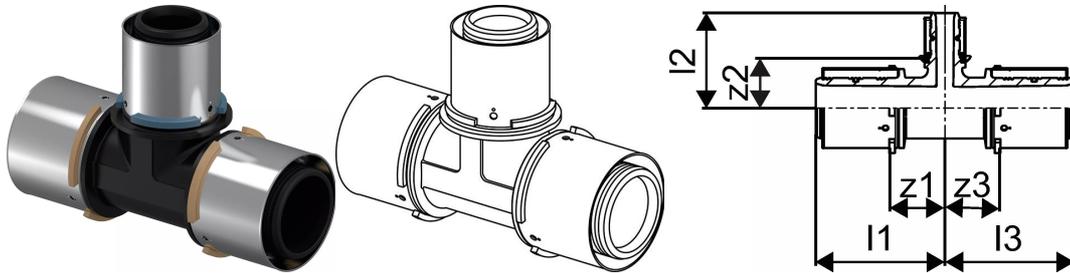

About Uponor S-Press composite tee reducer PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press composite tee reducer PPSU 50-40-50

1046400

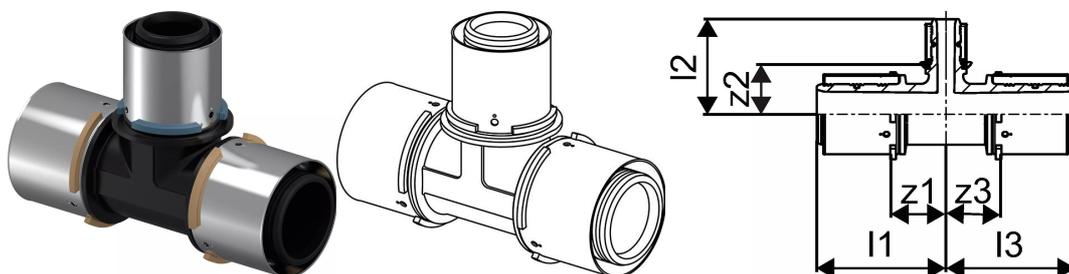

Technical data

Item (unit of measurement) pce

Item no VVS 087442150

Item no LVI 1722258

Item no NRF 5072015

Length (I1) 73 mm

Length (I2) 73 mm

Length (I3) 73 mm

z2 33 mm

z3 33 mm

Packaging Quantity PL1 3

Packaging Quantity PL4 288

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb