

## Uponor S-Press tee reducer 50-40-50

**1046927**

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code



### Application information Uponor S-Press tee reducer

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- if not different mentioned:  
Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.  
E.g.
  - DVGW
  - AENOR

## Uponor S-Press tee reducer 50-40-50

1046927

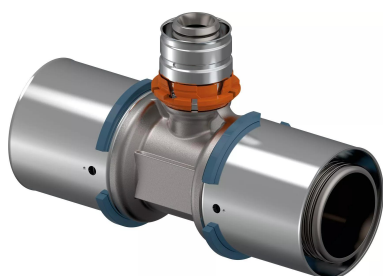

### Technical data

Item no VVS	045476445
Item (unit of measurement)	Piece
Length (l1)	72 mm
Length (l2)	79 mm
Length (l3)	72 mm
Z-measurement z2	41 mm
Z-measurement z3	34 mm
Packaging Quantity PL1	3
Packaging Quantity PL4	300

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E [info@uponor.com](mailto:info@uponor.com)  
F +358 (0)20 129 2841

[www.uponor.com](http://www.uponor.com)