

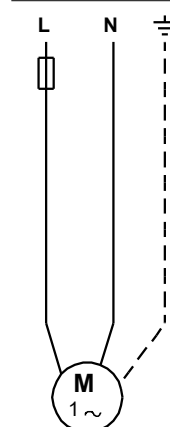


Description	Value
<b>General information:</b>	
Product name:	SQE 2-115
Product No:	On request
EAN number:	On request
<b>Technical:</b>	
Pump speed on which pump data are based:	10700 rpm
Rated flow:	2 m <sup>3</sup> /h
Rated head:	128 m
Stages:	7
Approvals:	CE,PCBC,RCM,EAC,CN RoHS Exempt,Morocco
Curve tolerance:	ISO9906:2012 3B
Pump No:	96080406
Model:	B
Valve:	pump with built-in non-return valve
<b>Materials:</b>	
Pump:	Stainless steel
Pump:	EN 1.4301
Pump:	AISI 304
Impeller:	Composite
Impeller:	ZYTEL 70G30 HSLR PA6.6-GF30
Motor:	Stainless steel
Motor:	DIN W.-Nr. 1.4301
Motor:	AISI 304
<b>Installation:</b>	
Maximum operating pressure:	15 bar
Pump outlet:	Rp1 1/4
Minimum borehole diameter:	76 mm
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	0 .. 35 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Motor type:	MSE3
Power input - P1:	2.46 kW
Rated power - P2:	1.85 kW
Power input P3:	1.57 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 200-240 V
Rated current:	12.3 A
Power factor:	1.00
Rated speed:	10700 rpm
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Built-in motor protection:	Y
Thermal protec:	internal
Length of cable:	1.5 m
Motor No:	96160857
<b>Controls:</b>	
CU 300/CU 301:	communication with CU 300/CU 301 possible
<b>Others:</b>	
Net weight:	5.95 kg
Gross weight:	6.68 kg



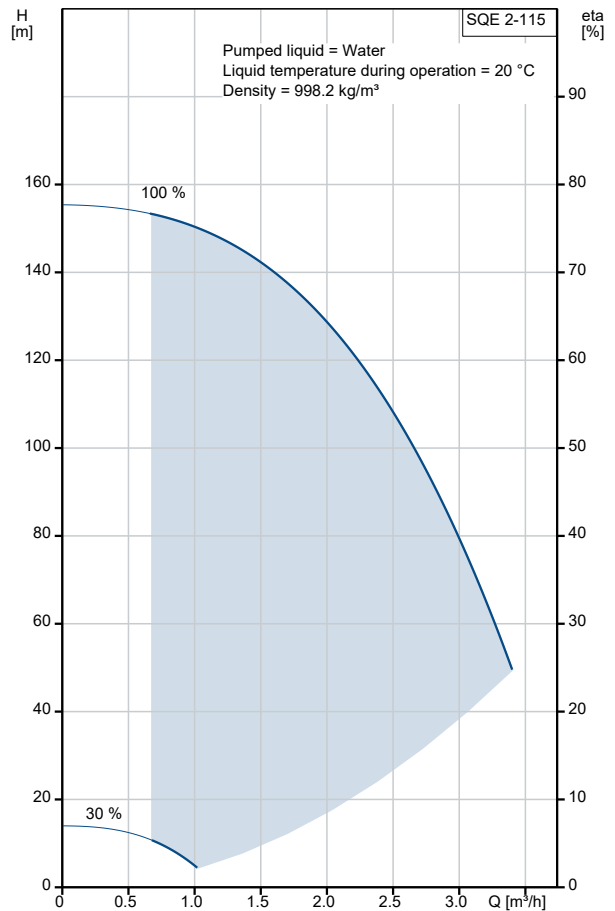

Company name: Tengi ehf

Created by:

Phone:

Date: 03/02/2022

Description	Value
Shipping volume:	0.011 m <sup>3</sup>
Sales region:	EU/S-AMREG/APREG
Danish VVS No.:	388442515
Swedish RSK No.:	5853374
Finnish LVI No.:	4762534
Country of origin:	DE
Custom tariff no.:	84137029