

**Qty. Description**

1 UNILIFT AP12.50.11.3



**Note! Product picture may differ from actual product**

Product No.: On request  
Submersible drainage pump type

Vertical single-stage stainless steel submersible pump with vertical discharge port and integrated submersible 3-phase totally enclosed motor in insulation class F. The pump is fitted with a suction strainer.

The impeller is a SEMI OPEN impeller for 12 mm free passage suitable for pumping groundwater, surface water, rain water and similar.

The pump has a double shaft seal and an intermediate oil chamber pre-filled with non-toxic special oil.

The pump has a riser pipe, a cooling jacket for continuous cooling of the motor by the pumped liquid and long-life deep-groove greased-for-life ball bearings.

The pump is ready for use as it is fitted with carrying handle and is supplied with a 10 m mains cable. The mains cable is of the plug type with glass sealing compound in the socket to prevent penetration of humidity into the stator windings.



Liquid:  
Pumped liquid: Any Newtonian liquid  
Liquid temperature range: 0 .. 55 °C  
Density: 998.2 kg/m<sup>3</sup>

Technical:  
Type of impeller: SEMI OPEN  
Maximum particle size: 12 mm

Materials:  
Pump housing: Stainless steel  
DIN W.-Nr. 1.4301  
AISI 304  
Impeller: Stainless steel  
DIN W.-Nr. 1.4301  
AISI 304

Qty.	Description
	<p>Cable union: Brass CW602N C35330</p> <p>Installation: Range of ambient temperature: 0 .. 55 °C Pump outlet: Rp 2 Maximum installation depth: 7 m</p> <p>Electrical data: Power input - P1: 1.9 kW Mains frequency: 50 Hz Rated voltage: 3 x 400 V Rated current: 3.2 A Cos phi - power factor: 0.88 Rated speed: 2785 rpm Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): F Length of cable: 10 m Type of cable plug: NONE</p> <p>Others: Net weight: 16 kg Gross weight: 17 kg Danish VVS No.: 391314112 Swedish RSK No.: 5880114 Country of origin: HU Custom tariff no.: 84137021</p>

## On request UNILIFT AP12.50.11.3 50 Hz

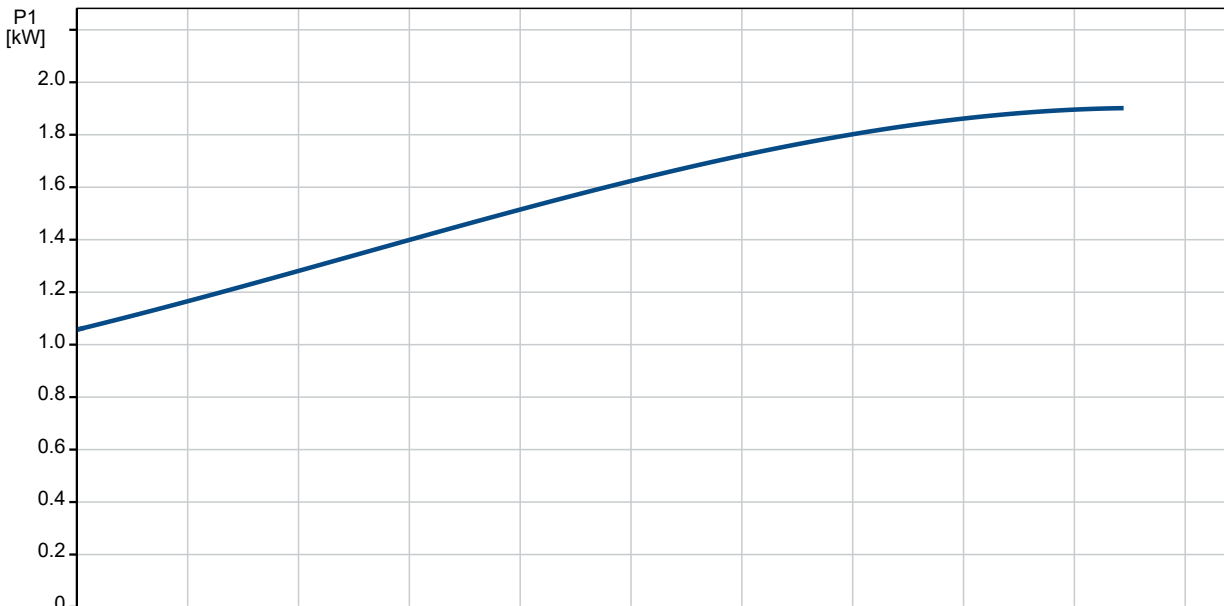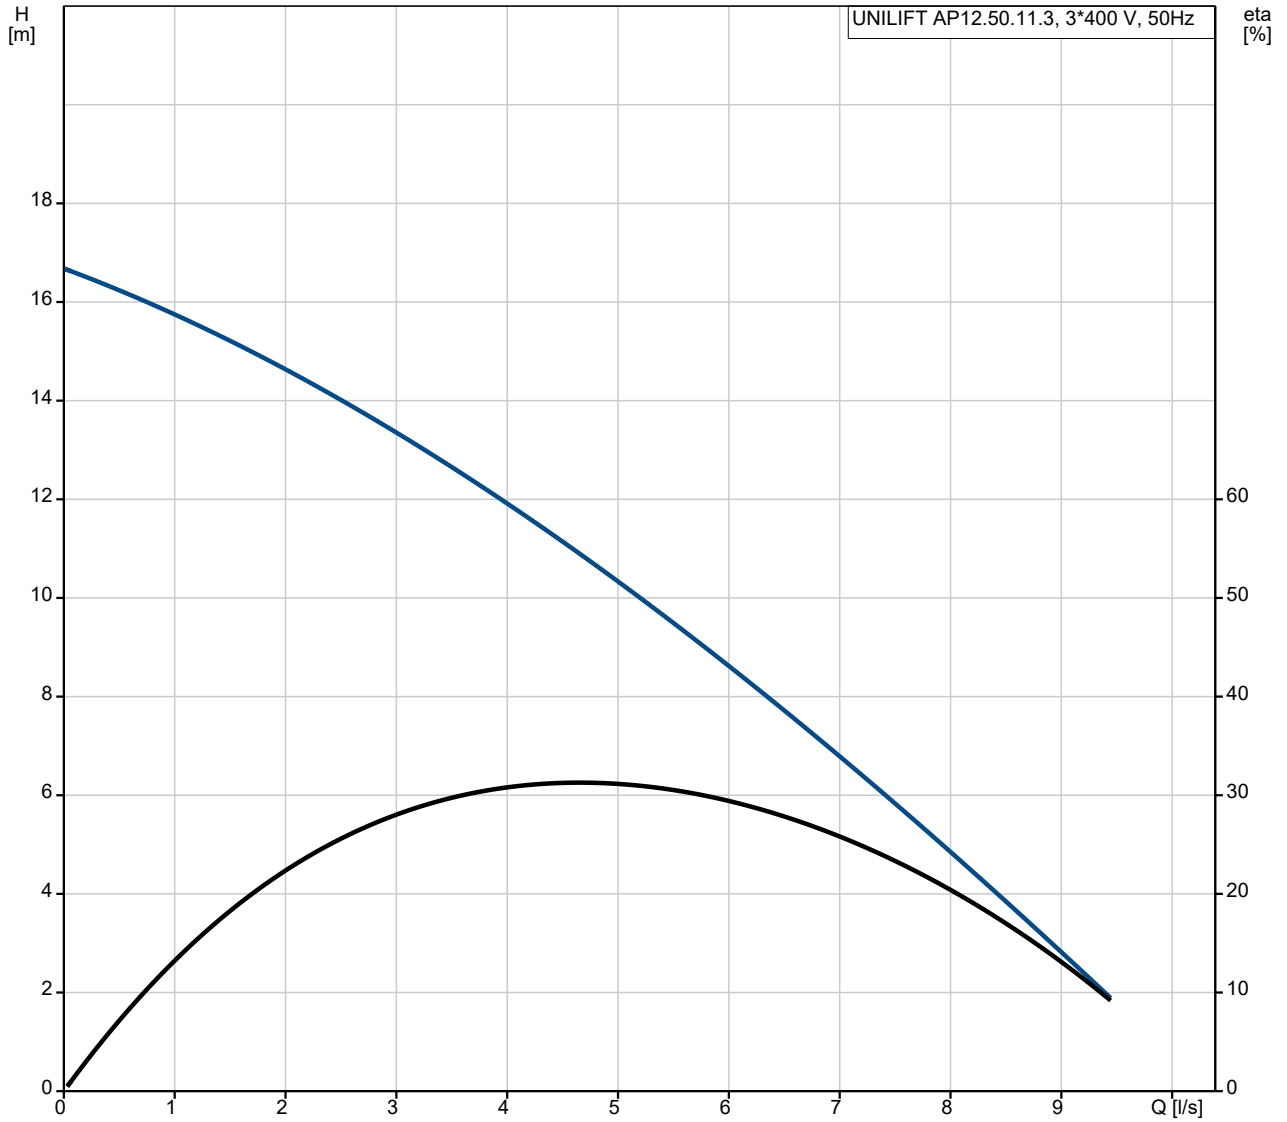

Description	Value
<b>General information:</b>	
Product name:	UNILIFT AP12.50.11.3
Product No:	On request
EAN number:	On request
<b>Technical:</b>	
Max flow:	8.89 l/s
Max flow:	8.89 l/s
Head max:	18 m
Type of impeller:	SEMI OPEN
Maximum particle size:	12 mm
<b>Materials:</b>	
Pump housing:	Stainless steel
Pump housing:	DIN W.-Nr. 1.4301
Pump housing:	AISI 304
Impeller:	Stainless steel
Impeller:	DIN W.-Nr. 1.4301
Impeller:	AISI 304
Cable union:	Brass
Cable union:	CW602N
Cable union:	C35330
<b>Installation:</b>	
Range of ambient temperature:	0 .. 55 °C
Pump outlet:	Rp 2
Maximum installation depth:	7 m
Inst dry/wet:	D/S
Installation:	horizontal or vertical
<b>Liquid:</b>	
Pumped liquid:	Any Newtonian liquid
Liquid temperature range:	0 .. 55 °C
Density:	998.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Power input - P1:	1.9 kW
P2:	1.2 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 400 V
Rated current:	3.2 A
Cos phi - power factor:	0.88
Rated speed:	2785 rpm
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Built-in motor protection:	NONE
Thermal protec:	external
Length of cable:	10 m
Type of cable plug:	NONE
<b>Others:</b>	
Net weight:	16 kg
Gross weight:	17 kg
Danish VVS No.:	391314112
Swedish RSK No.:	5880114
Country of origin:	HU
Custom tariff no.:	84137021

