

Qty.	Description
------	-------------

1	<b>Unilift CC9 - AG1</b>
---	--------------------------



**Note! Product picture may differ from actual product**

Product No.: On request

Grundfos Unilift CC pumps are single-stage submersible pumps with a low suction ability down to 3 mm water level.

The pumps are designed for pumping rainwater and grey wastewater, e.g. from

- washing machines, baths, sinks, etc. from low-lying parts of buildings up to sewer level
- cellars or buildings prone to flooding
- draining wells
- wells for surface water with inlets from roof gutters, pits, tunnels, etc.
- swimming pools, ponds or fountains.

The pumps are suitable for both stationary and portable use.





They are for automatic operation equipped with a guided float switch on a lever arm for narrow tanks and pump sumps.

The pumps allow free passage of particles up to  $\varnothing 10$  mm.

The motor incorporates automatic overload protection cutting out the motor in case of overload.

When cooled to normal temperature, the motor restarts automatically.

Description	Value
<b>General information:</b>	
Product name:	Unilift CC9 - AG1
Product No:	On request
EAN number:	On request
<b>Technical:</b>	
Rated flow:	1.85 l/s
Maximum flow:	3.89 l/s
Rated head:	6.56 m
Maximum head:	9 m
Max. Particle:	10 mm
Approvals:	CE,LGA,VDE,GS,EMV,GOST
Rated driver speed:	2850 rpm
<b>Materials:</b>	
Pump housing:	Polypropylene
Pump housing:	PP - GF15
Impeller:	PPOm 20 GF
Motor:	Stainless steel
Motor:	EN 1.4301
Motor:	AISI 304
Shaft:	Stainless steel
Shaft:	EN 1.4301
Shaft:	AISI 304
<b>Installation:</b>	
Type of connection:	R
Size of connection:	1 1/4 inch
Maximum installation depth:	7 m
<b>Liquid:</b>	
Pumped liquid:	Any Newtonian liquid
Liquid temperature range:	0 .. 40 °C
Density:	998.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Power input P1:	780 W
P2:	465 W
Mains frequency:	50 Hz
Rated voltage:	1 x 220-240 V
Rated current:	3.5 A
Capacitor size - run:	8 µF/450 V
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	B
Built-in motor protection:	YES
Length of power cable:	10 m
Type of cable plug:	SCHUKO
<b>Controls:</b>	
Level switch:	float switch
<b>Others:</b>	
Net weight:	6.94 kg
Gross weight:	7.7 kg
Shipping volume:	0.021 m <sup>3</sup>
Danish VVS No.:	391280392
Swedish RSK No.:	5886001
Finnish LVI No.:	4822530
Country of origin:	HU
Custom tariff no.:	84137021

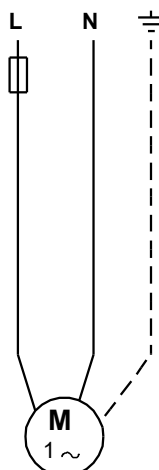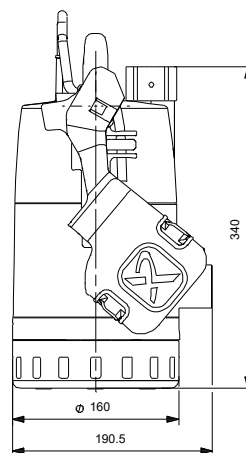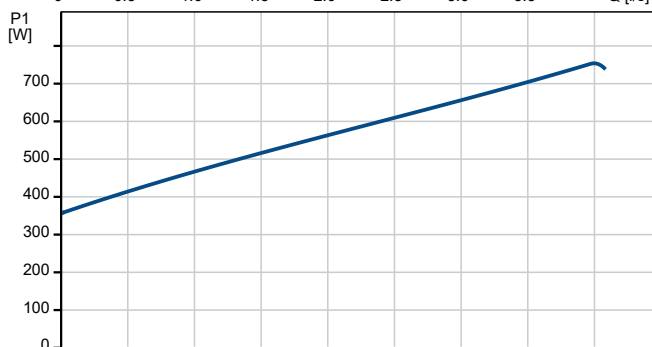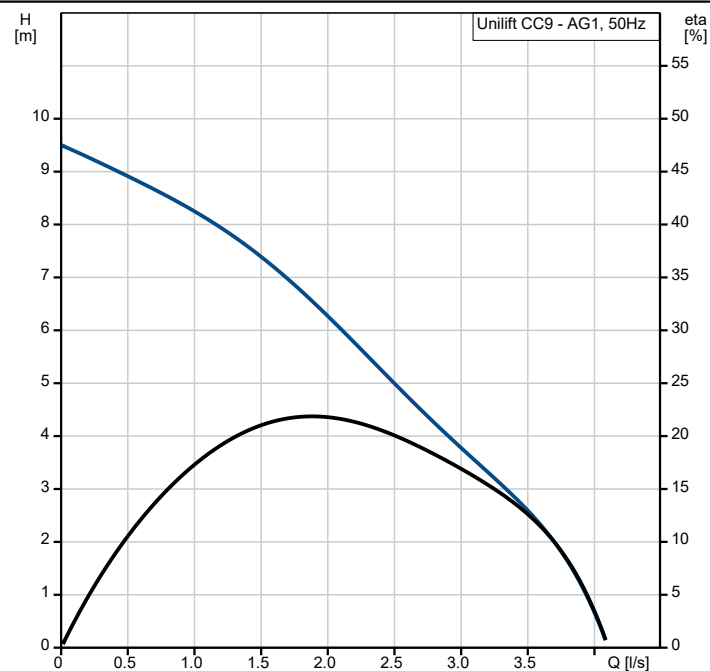

## On request Unilift CC9 - AG1 50 Hz

