

**Qty. Description**

1 UNILIFT KP350-M-1



**Note! Product picture may differ from actual product**

Product No.: On request  
Submersible drainage pump

Vertical single-stage stainless steel submersible pump with vertical discharge port and integrated submersible 1-phase canned motor in insulation class F with thermal overload protection.

The pump is fitted with a suction strainer, a carrying handle and is supplied with a 10 m mains cable.

The impeller is a semi-open impeller for 10 mm free passage suitable for pumping groundwater, surface water, rain water and similar liquids.

The pump has a double shaft seal consisting of two lip seals with grease in-between.

The pump has an outer casing ensuring continuous cooling of the motor by the pumped liquid. The rotor shaft operates in two maintenance-free carbon bearings cooled by the pumped liquid

The motor is filled with a non-toxic motor liquid.

**Liquid:**

Pumped liquid: Any Newtonian liquid

Liquid temperature range: 0 .. 40 °C

Density: 998.2 kg/m<sup>3</sup>

**Technical:**

Maximum flow: 3.89 l/s

Max. Particle: 10 mm

**Materials:**

Pump housing: Stainless steel  
EN 1.4301  
AISI 304

Impeller: Stainless steel  
EN 1.4301  
AISI 304

**Installation:**

Range of ambient temperature: 0 .. 50 °C



Company name: Tengji ehf

Created by:



Phone:

Date: 11/02/2022

**Qty. Description**

Type of connection:	Rp
Size of connection:	1 1/4 inch
Maximum installation depth:	7 m
Electrical data:	
Power input - P1:	720 W
Mains frequency:	50 Hz
Rated voltage:	1 x 220-240 V
Rated current:	3.2 A
Capacitor size - run:	10 µF/400 V
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Length of power cable:	10 m
Type of cable plug:	SCHUKO
Others:	
Net weight:	7.47 kg
Gross weight:	8.15 kg
Shipping volume:	0.013 m <sup>3</sup>
Danish VVS No.:	391214035
Swedish RSK No.:	5885707
Finnish LVI No.:	4822558
Norwegian NRF no.:	9040796
Country of origin:	HU
Custom tariff no.:	84137021

## On request UNILIFT KP350-M-1 50 Hz

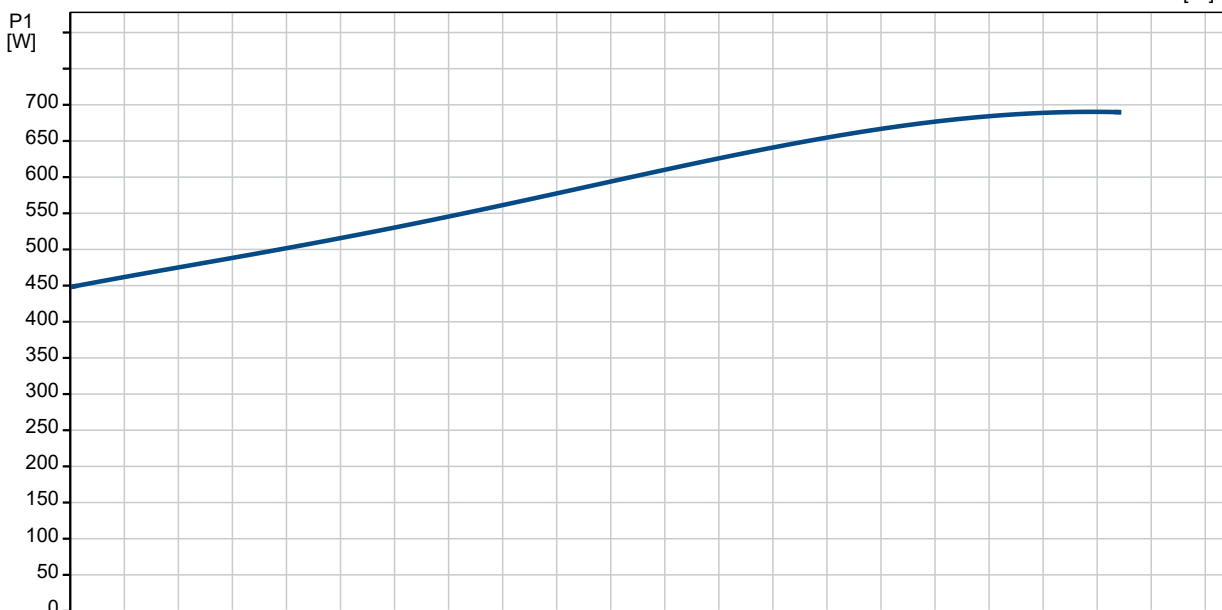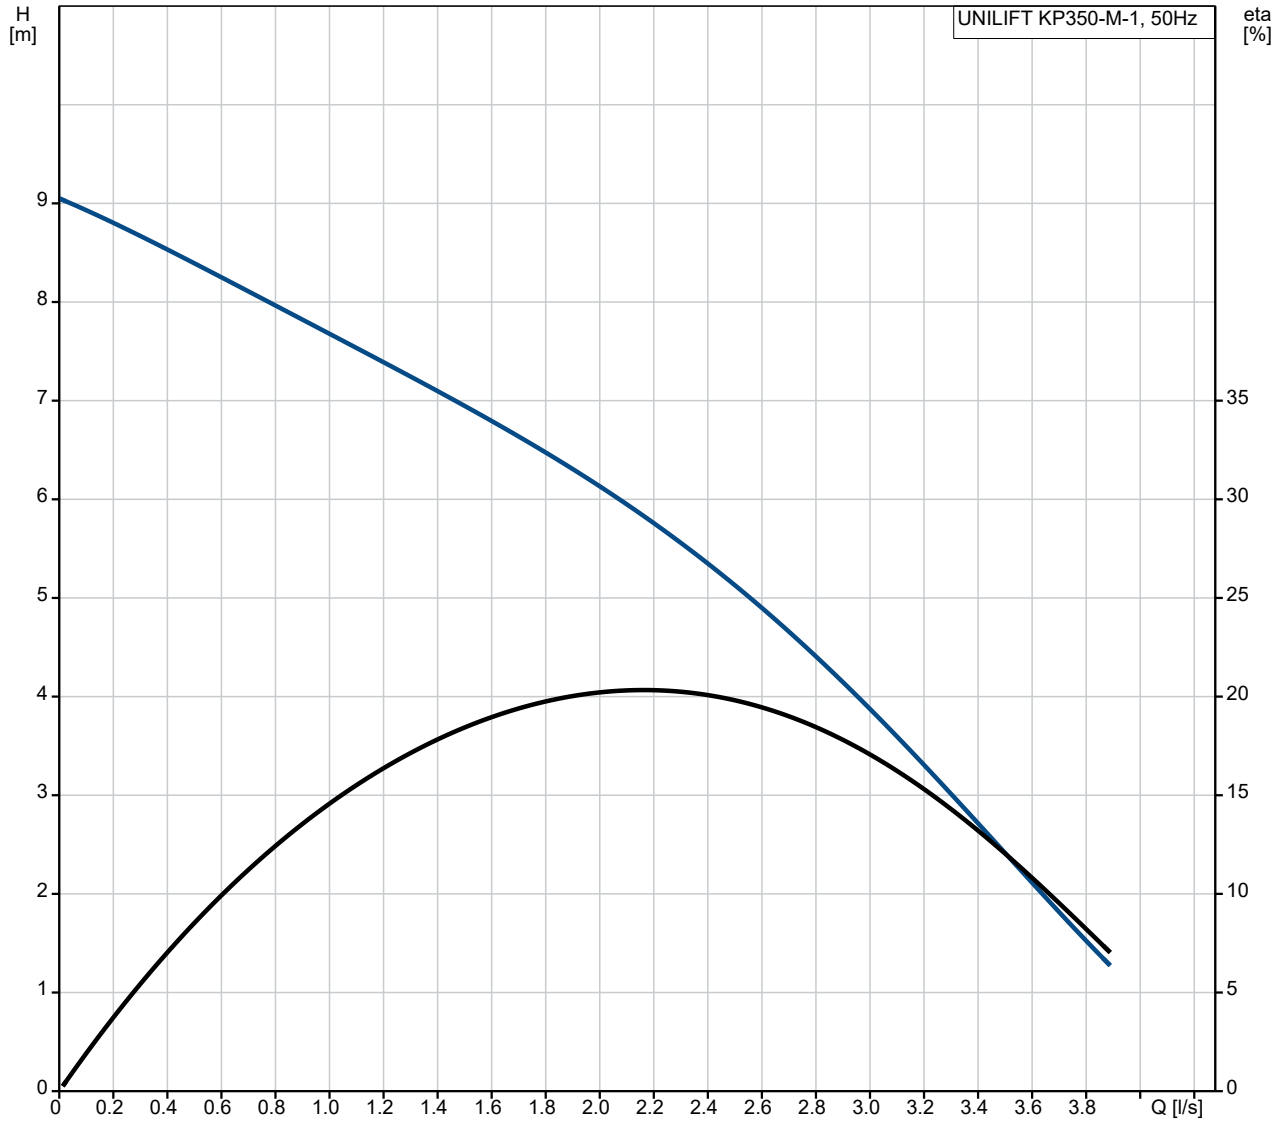

Description	Value
<b>General information:</b>	
Product name:	UNILIFT KP350-M-1
Product No:	On request
EAN number:	On request
<b>Technical:</b>	
Maximum flow:	3.89 l/s
Maximum head:	9 m
Max. Particle:	10 mm
Model:	A
<b>Materials:</b>	
Pump housing:	Stainless steel
Pump housing:	EN 1.4301
Pump housing:	AISI 304
Impeller:	Stainless steel
Impeller:	EN 1.4301
Impeller:	AISI 304
<b>Installation:</b>	
Range of ambient temperature:	0 .. 50 °C
Type of connection:	Rp
Size of connection:	1 1/4 inch
Maximum installation depth:	7 m
<b>Liquid:</b>	
Pumped liquid:	Any Newtonian liquid
Liquid temperature range:	0 .. 40 °C
Density:	998.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Power input - P1:	720 W
Mains frequency:	50 Hz
Rated voltage:	1 x 220-240 V
Rated current:	3.2 A
Capacitor size - run:	10 µF/400 V
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Built-in motor protection:	CONTACT
Thermal protec:	internal
Length of power cable:	10 m
Type of cable plug:	SCHUKO
<b>Others:</b>	
Net weight:	7.47 kg
Gross weight:	8.15 kg
Shipping volume:	0.013 m <sup>3</sup>
Danish VVS No.:	391214035
Swedish RSK No.:	5885707
Finnish LVI No.:	4822558
Norwegian NRF no.:	9040796
Country of origin:	HU
Custom tariff no.:	84137021

