

EAN: 4015474212701
static.hansa.com/03032273



- Washbasin
- Single-lever
- Deck mounted
- Chrome
- Fixed spout
- PCA® - constant flow rate regardless of pressure variations, Hidden aerator
- Single operating lever/handle, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- ø 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass
- WithoutPopUpWaste, WithoutDrawRodOpening

Technical data

Flow properties


Flow-rate at 3 bar (with flow controller)	6.0 l/min
Pressure loss with flow (0.1 l/s)	2 bar


Technical properties

DN-size (nominal dimension)	DN15
Hot water supply	max. +80°C
Working pressure	1-10 bar
Connection size	G3/8
Projection	148 mm


Regulations

EN standard	EN 817
Noise class	I (ISO 3822)

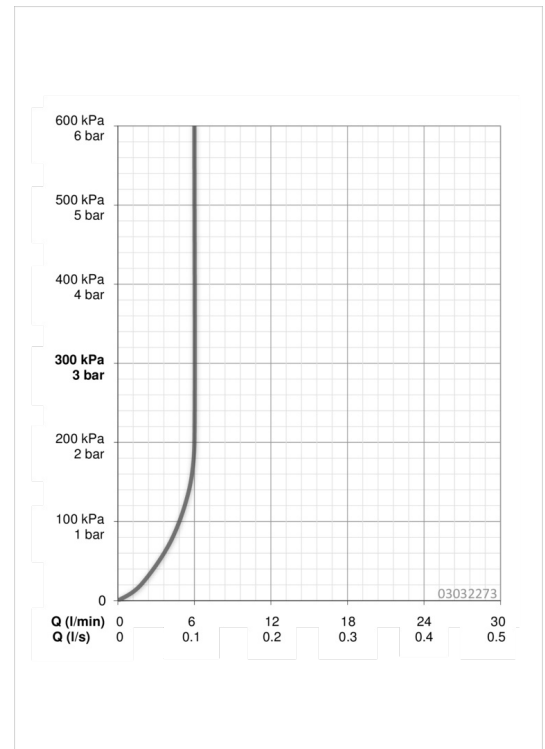

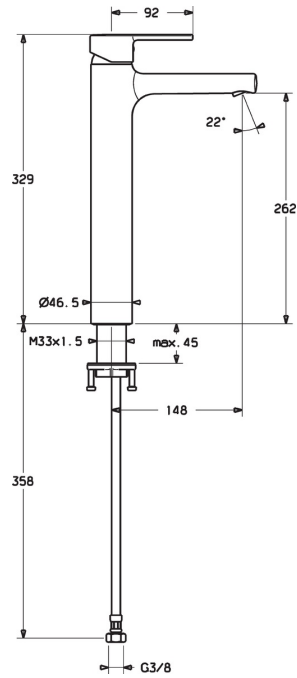

Spare parts

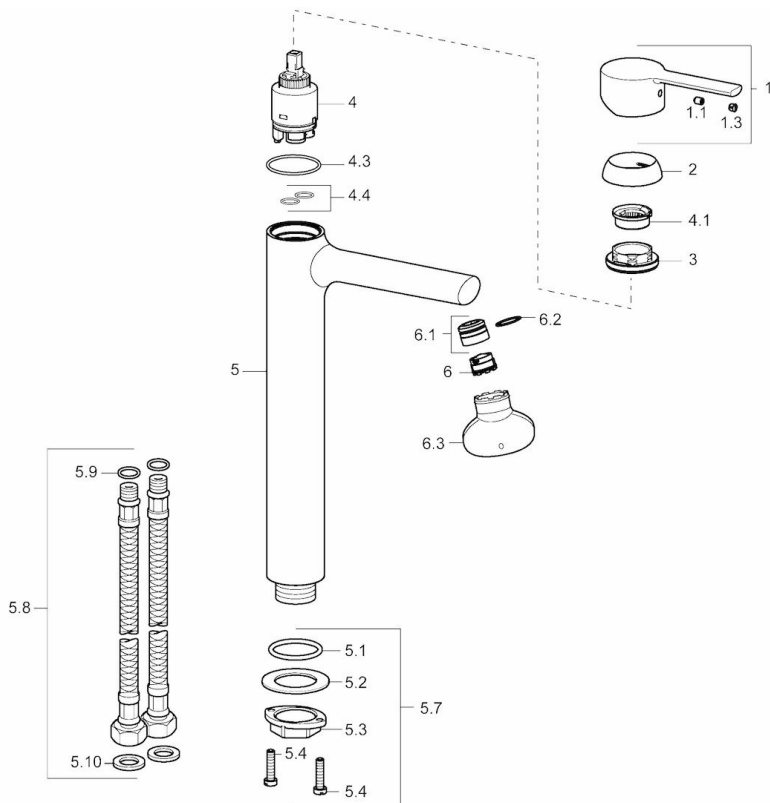

SP03032273

	Name	Code
1	Lever	59913761
1.1	Screw, M5x8, SW2.5	59904755
1.3	Cover plug	59913762
2	Covering cap, 33 x 3 mm	59912504
3	Tightening nut, M40x1, SW30	59913210
4	Cartridge, 3.5 Eco	59912324
4	Cartridge, 3.5 Classic	59913075
4.1	Temperature adjustment limiter	59912325
4.3	O-ring, d 28.24x2.62	59912590
4.4	O-ring, d 10.10x1.60	59905072
5.1	O-ring, d 36,09 X d 3,53	59913396
5.10	Gasket, 9.5x14.4x2	59912551
5.7	Fixing set	59913479
5.8	Flexible pipe, M10x1-G3/8, L=590	59913166
5.9	O-ring, d 7.65x1.78	59902337
6	Aerator, M18.5x1, TJ	59913366
6.1	Fitting ring for aerator	59913654
6.3	Key for aerator, M18.5	59913367
N.I.	Key, SW 30/34	59912108