



EAN: 4057304014390
static.hansa.com/0920220333

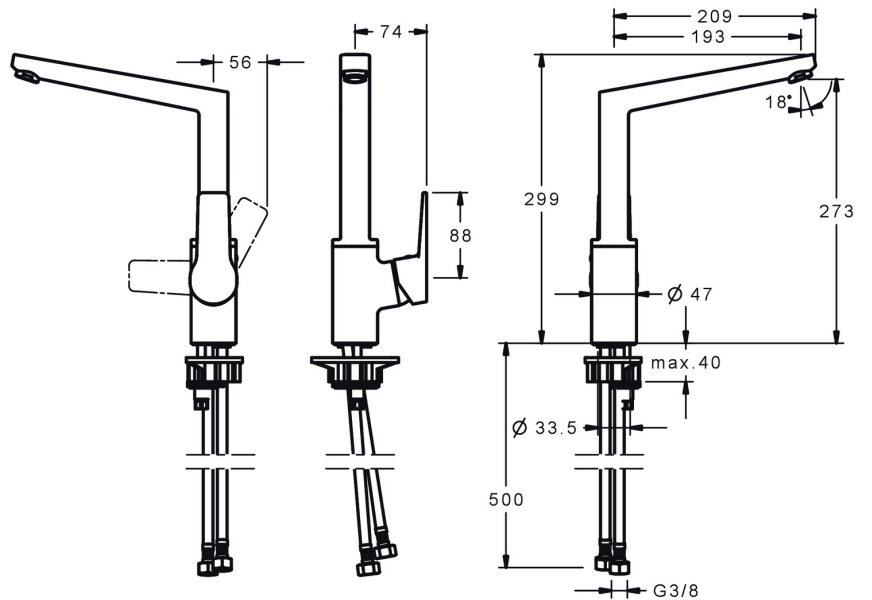

- Kitchen
- Single-lever, side operated
- Deck mounted
- Matt black
- Swivel spout, Casted construction
- Standard aerator
- Hot/Cold symbols, Single operating lever/handle
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- \varnothing 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass, Surfaces in contact with drinking water contain less than 0.3% lead, Waterways without nickel coating

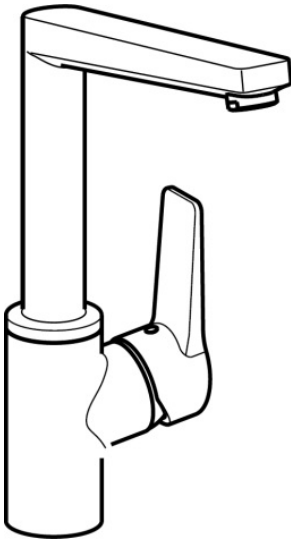

Technical data

Flow properties

Flow-rate at 3 bar	12.0 l/min
Pressure loss with flow (0.2 l/s)	3 bar

Technical properties


DN-size (nominal dimension)	DN15
Hot water supply	max. +80°C
Working pressure	0.5-10 bar
Connection size	G3/8
Projection	193 mm
Backflow prevention (EN1717)	AA
Material	Brass

Regulations


EN standard	EN 817
Noise class	I (ISO 3822)

Approvals and Declarations

DVGW	NW-6506CQ0410
ABP	P-IX 38406/IZ

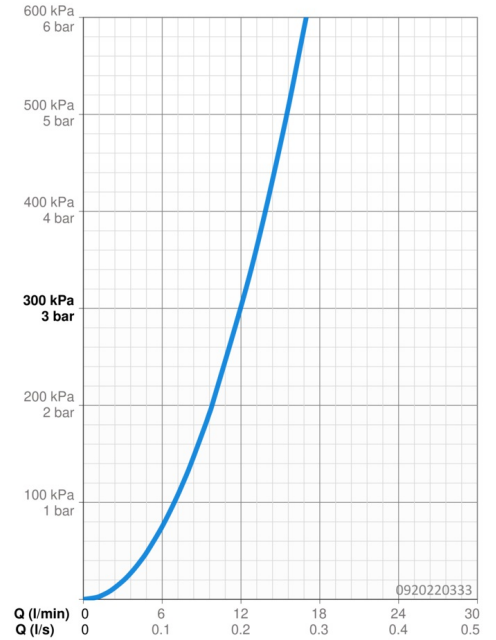

Spare parts

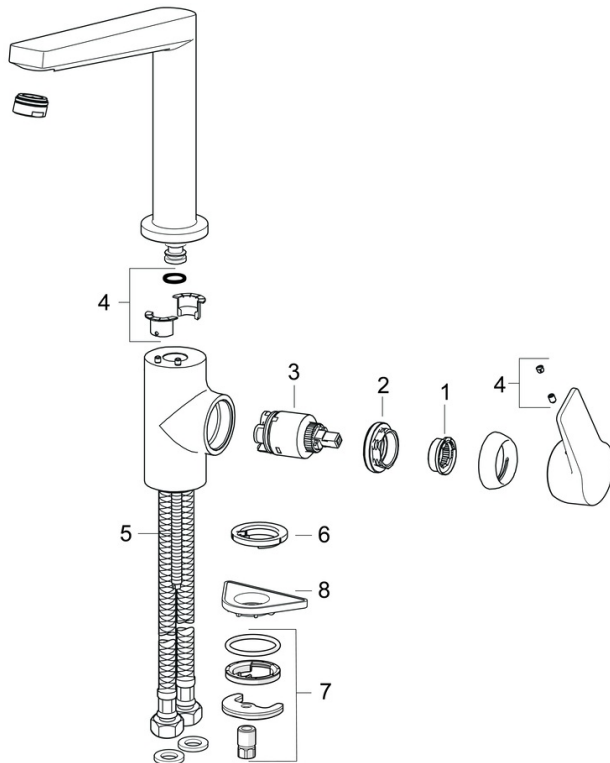

SP0920220333

	Name	Code
01	Temperature adjustment limiter	59912325
02	Tightening nut, M40x1, SW30	59913210
03	Cartridge, 3.5 Classic	59913075
04	Sealing kit	59911884
05	Fixing screw, M8x1, L=140	59912474
06	Bottom seal	59914591
07	Fixing set	59910749
08	Supporting plate	59910008