


Uponor S-Press PLUS adapter swivel nut 16-G1/2"SN

1070602

- Made of tin-plated DR brass
- Releasable screw connector for connection to on-wall fittings, filters and shut-off valves
- Thread acc. to EN ISO 228-1.

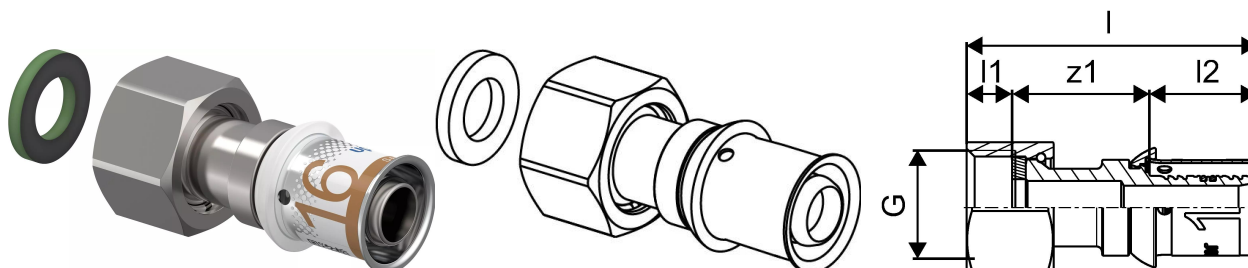

Application information Uponor S-Press PLUS adapter swivel nut

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

Uponor S-Press PLUS adapter swivel nut 16-G1/2"SN

1070602

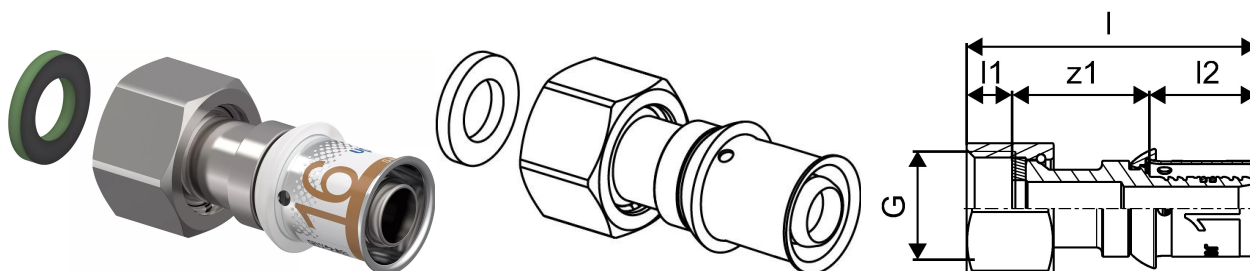

Technical data

Item (unit of measurement)	pce
Item no VVS	045483189
Item no LVI	1720776
Item no NRF	5114522
Length (l)	53 mm
Length (l1)	8 mm
Length (l2)	20 mm
Packaging Quantity PL1	1
Packaging Quantity PL2	30
Packaging Quantity PL4	5760

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com