


## Uponor S-Press adapter female thread 50-Rp1 1/2"FT

**1046907**

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

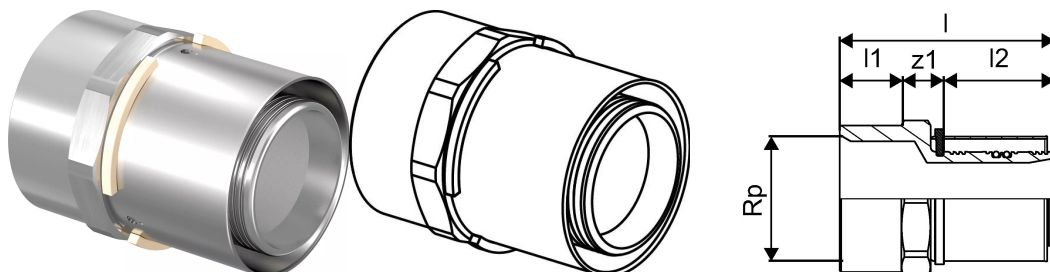

### Application information Uponor S-Press adapter female thread

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

## Uponor S-Press adapter female thread 50-Rp1 1/2"FT

1046907

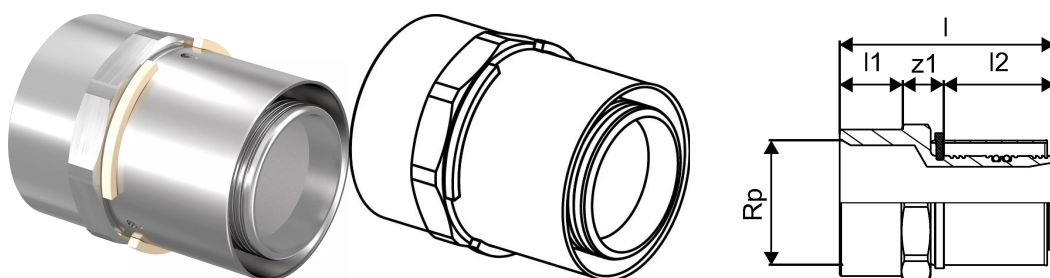

### Technical data

|                            |            |
|----------------------------|------------|
| Item (unit of measurement) | pce        |
| Item no VVS                | 045482445  |
| Item no NRF                | 5071554    |
| Female thread Rp           | 1 1/2 inch |
| Length (l)                 | 73 mm      |
| Length (l1)                | 21 mm      |
| Length (l2)                | 38 mm      |
| Packaging Quantity PL1     | 3          |
| Packaging Quantity PL4     | 1152       |

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com