


Uponor S-Press PLUS tee red. PPSU 20-25-20

1039952

- Fixed stainless steel sleeve

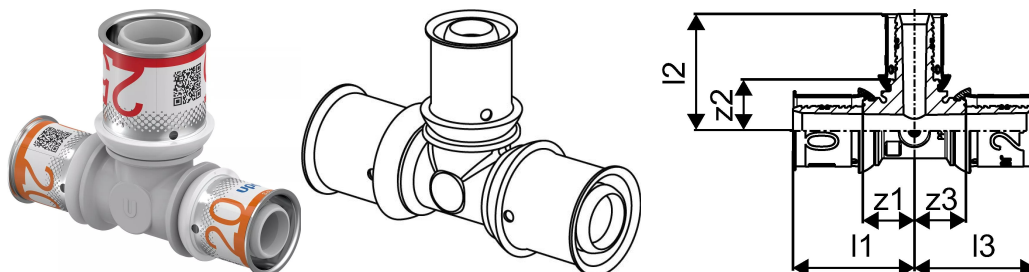

About Uponor S-Press PLUS tee red. PPSU

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS tee red. PPSU 20-25-20

1039952

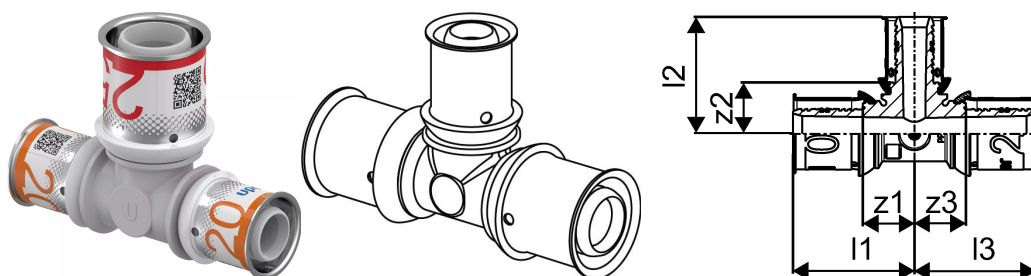

Technical data

Item (unit of measurement)	pce
Item no VVS	087440121
Item no LVI	1720709
Item no NRF	5114406
Length (I1)	41 mm
Length (I2)	48 mm
Length (I3)	41 mm
z2	19 mm
z3	19 mm
Packaging Quantity PL1	10
Packaging Quantity PL3	80
Packaging Quantity PL4	1920

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb