


Uponor S-Press PLUS tee reducer 25-20-25

1070577

- Made of tin-plated DR brass

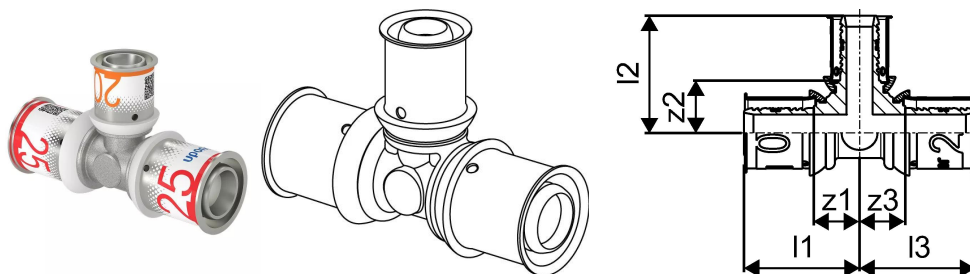

Application information Uponor S-Press PLUS tee reducer

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS tee reducer 25-20-25

1070577

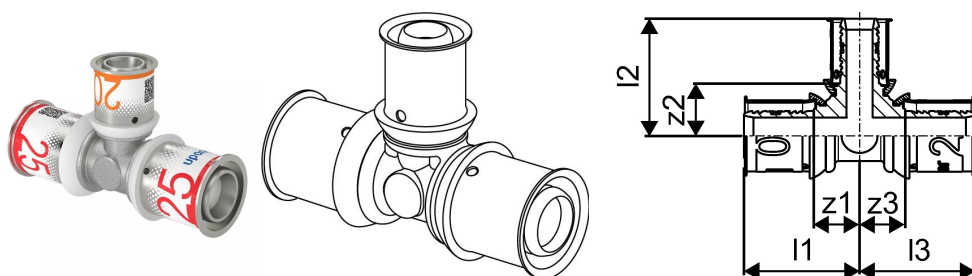

Technical data

| | |
|----------------------------|-----------|
| Item no VVS | 045476308 |
| Item no NRF | 5114503 |
| Item (unit of measurement) | Piece |
| Length (l1) | 44 mm |
| Length (l2) | 40 mm |
| Length (l3) | 44 mm |
| Z-measurement z2 | 19 mm |
| Z-measurement z3 | 16 mm |
| Packaging Quantity PL1 | 5 |
| Packaging Quantity PL3 | 20 |
| Packaging Quantity PL4 | 1920 |

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com